

Matthew Cordone Architect PLLC

DESIGN + PRESERVATION + PLANNING

**243 Judson Avenue
Dobbs Ferry, NY 10522**

Application # A2021-0330

AHRB Submission



Figure 1: Existing front (west) elevation



Figure 2: Existing side (south) elevation

Matthew Cordone Architect PLLC

DESIGN + PRESERVATION + PLANNING



Figure 3: Existing side (north) elevation



Figure 4: Existing rear (east) elevation

Matthew Cordone Architect PLLC

DESIGN + PRESERVATION + PLANNING



Figure 5: New shutters to match style of existing shutters. Paint new and existing shutters Benjamin Moore Ocean Tropic (see attached paint specs).



Figure 6: Relocate existing exterior kitchen door to new mudroom. Paint door Benjamin Moore Ocean Tropic (see attached paint specs).



Figure 7: Relocate existing exterior sliding door to new yoga room. Keep existing white vinyl finish.

decorator's white

Showing 1 - 10 of 370 results for "decorator's white"



Decorator's White OC-149



Q ocean tropic

Showing 1 - 10 of 38 results for "ocean tropic"



Ocean Tropic 2052-10





Ocean Tropic

2052-10

COLOR DETAIL

SEE IN ROOM

BUY SAMPLES & PAINT



Q gray huskie

Showing 1 - 10 of 335 results for "gray huskie"



Gray Huskie 1473





Gray Huskie
1473





COLOR DETAIL



SEE IN ROOM



BUY SAMPLES
& PAINT



SAVE YOUR COLORS

To save this color selection, share it or send yourself an email. Take it to your nearest Benjamin Moore retailer below to find the right style and finish.



0




0



Front Door 2

DOOR
Ocean Tropic
2052-10 >



SHOP NOW >



SIDING
Decorator's White
OC-149 >
SHOP NOW >




TRIM
Decorator's White
OC-149 >
SHOP NOW >



To find the best paint & finish for your project, talk with your local Benjamin Moore retailer.

To save this color palette, share it.



DATE: _____ TYPE: _____

NAME: _____

PROJECT: _____

Incandescent

P5712-30

Cylinder

5" downlight non-metallic wall cylinder in a White finish. cCSAus listed for wet locations.

- White finish.
- Interior or exterior use.
- Wet location listed.
- Non-corrosive components withstand salt, wind, water & sun damage.
- Ideal for coastal locations.

Category: Outdoor

Finish: White (powder coat paint)

Construction: Polycarbonate Construction





Width: 5"
Height: 7-1/4"
Depth: 7-3/4"
H/CTR: 2-1/2"

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
Wall mounted Mounting strap for outlet box included Back plate covers a standard 4" octagonal recessed outlet box 4.5" W.	Pre-wired 6" of wire supplied 120 V	Quantity: One 75w max. BR-30 E26 base ceramic socket	UL-CUL Wet location listed 1 year warranty

Type		
	-30	-31
P5712	☐	☐
P5713	☐	☐

Catalog No.	Finish		Lamping	Dimensions (Inches)			
	White	Black		A	B	C	D
P5712	-30	-31	1-75w PAR30, 65w BR30	4-7/8	7-1/4	7-3/4	2-1/2
P5713	-30	-31	2-75w PAR30	5	14	7-1/4	7

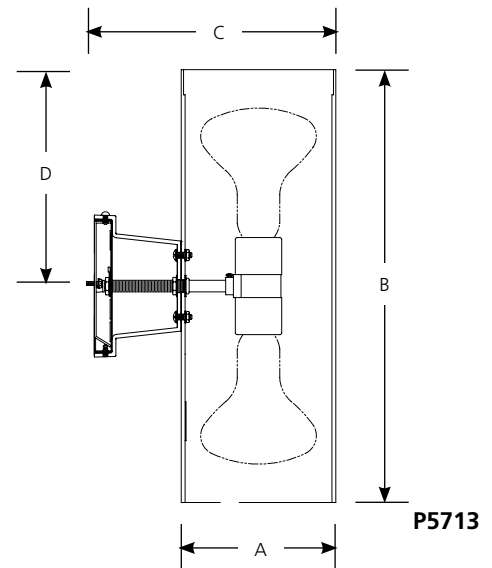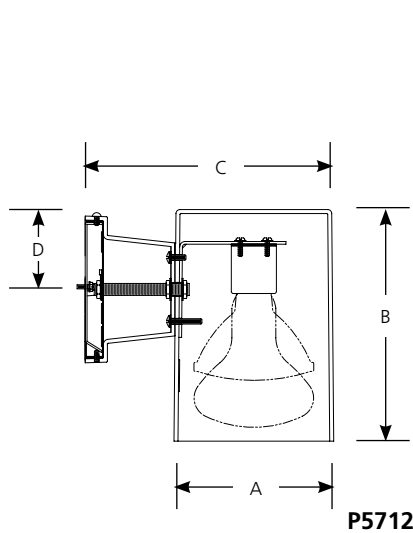

Specifications:

General

- Polycarbonate construction
- Interior or exterior use
- Non corrosive hardware supplied
- P5712 – Down lighting. Shields PAR lamps to minimize glare and provide compliance with turtle laws (check local codes)
- P5713 – up/down lighting. P8799 top cover lens recommended when unit is used outdoors

Mounting

- Wall mounted
- Covers any outlet box
- Mounting bracket is 4-1/2" square
- Outlet box mounting bracket is supplied. Permits attachment of unit to wall with one almost invisible set screw

Electrical

- Medium based ceramic socket with nickel plated brass screw shell

Accessories

- P8799-30 or -31 top lens cover for P5713 fixture
- P8712-30 or -31 sea turtle accessory for use with P5712 only

Labeling

- UL-CUL wet location listing for P5712 and P5713 with P8799 cover
- UL-CUL listing for P5713 for indoor use with no cover

400 SERIES TILT-WASH DOUBLE-HUNG FULL-FRAME WINDOWS



Table of Tilt-Wash Double-Hung Window Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96

Window Dimension	1'-9 5/8" (549)	2'-1 5/8" (651)	2'-5 5/8" (752)	2'-7 5/8" (803)	2'-9 5/8" (854)	2'-11 5/8" (905)	3'-1 5/8" (956)	3'-5 5/8" (1057)	3'-9 5/8" (1159)
Minimum Rough Opening	1'-10 1/8" (562)	2'-2 1/8" (664)	2'-6 1/8" (765)	2'-8 1/8" (816)	2'-10 1/8" (867)	3'-0 1/8" (917)	3'-2 1/8" (968)	3'-6 1/8" (1070)	3'-10 1/8" (1172)
Unobstructed Glass (lower sash only)	15" (381)	19" (483)	23" (584)	25" (635)	27" (686)	29" (737)	31" (787)	35" (889)	39" (991)

CUSTOM WIDTHS – 21 5/8" to 45 5/8"

CUSTOM HEIGHTS – 36 7/8" to 92 7/8"	3'-0 7/8" (937)	3'-4 7/8" (1038)	3'-8 7/8" (1140)	4'-0 7/8" (1241)	4'-4 7/8" (1343)	4'-8 7/8" (1445)	5'-0 7/8" (1546)	5'-4 7/8" (1648)	5'-8 7/8" (1749)	6'-0 7/8" (1851)	6'-4 7/8" (1953)
TW18210	TW20210	TW24210	TW26210	TW28210	TW210210	TW30210	TW34210	TW38210			
TW1832	TW2032	TW2432	TW2632	TW2832	TW21032	TW3032	TW3432	TW3832			
TW1836	TW2036	TW2436	TW2636	TW2836	TW21036	TW3036	TW3436	TW3836			
TW18310	TW20310	TW24310	TW26310	TW28310	TW210310	TW30310	TW34310	TW38310			
TW1842	TW2042	TW2442	TW2642	TW2842	TW21042	TW3042	TW3442	TW3842			
TW1846	TW2046	TW2446	TW2646	TW2846	TW21046	TW3046 [◊]	TW3446 [◊]	TW3846 [◊]			
TW18410	TW20410	TW24410	TW26410	TW28410	TW210410 [◊]	TW30410 [◊]	TW34410 [◊]	TW38410 [◊]			
TW1852	TW2052	TW2452	TW2652	TW2852 [◊]	TW21052 [◊]	TW3052 [◊]	TW3452 [◊]	TW3852 [◊]			
TW1856	TW2056	TW2456	TW2656 [◊]	TW2856 [◊]	TW21056 [◊]	TW3056 [◊]	TW3456 [◊]	TW3856 [◊]			
TW18510	TW20510	TW24510 [◊]	TW26510 [◊]	TW28510 [◊]	TW210510 [◊]	TW30510 [◊]	TW34510 [◊]	TW38510 [◊]			
TW1862	TW2062	TW2462 [◊]	TW2662 [◊]	TW2862 [◊]	TW21062 [◊]	TW3062 [◊]	TW3462 [◊]	TW3862 [◊]			




Custom-size windows are available in 1/8" (3) increments.

Cottage or reverse cottage sash ratio available for heights shown below in all widths.

CUSTOM WIDTHS – 21 5/8" to 45 5/8"

CUSTOM HEIGHTS – 48 7/8" to 76 7/8"

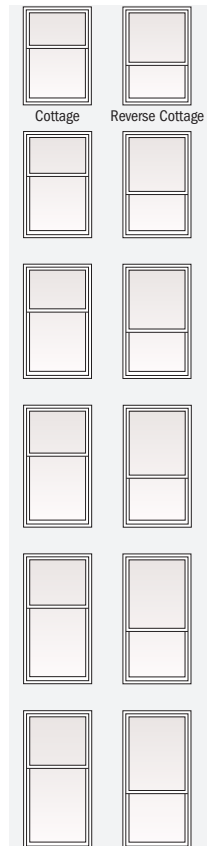

Size tables for windows with cottage or reverse cottage sash are available at andersenwindows.com/sizing.

- "Window Dimension" always refers to outside frame-to-frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- ◊ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

continued on next page

400 SERIES TILT-WASH DOUBLE-HUNG FULL-FRAME WINDOWS



Table of Tilt-Wash Double-Hung Window Sizes *(continued)*

Scale 1/8" (3) = 1'-0" (305) – 1:96

Window Dimension	1'-9 5/8"	2'-1 5/8"	2'-5 5/8"	2'-7 5/8"	2'-9 5/8"	2'-11 5/8"	3'-1 5/8"	3'-5 5/8"	3'-9 5/8"
	(549)	(651)	(752)	(803)	(854)	(905)	(956)	(1057)	(1159)
Minimum Rough Opening	1'-10 1/8"	2'-2 1/8"	2'-6 1/8"	2'-8 1/8"	2'-10 1/8"	3'-0 1/8"	3'-2 1/8"	3'-6 1/8"	3'-10 1/8"
	(562)	(664)	(765)	(816)	(867)	(917)	(968)	(1070)	(1172)
Unobstructed Glass (lower sash only)	15"	19"	23"	25"	27"	29"	31"	35"	39"
	(381)	(483)	(584)	(635)	(686)	(737)	(787)	(889)	(991)

CUSTOM WIDTHS – 21 5/8" to 45 5/8"									
7'-4 7/8" (2257) 7'-4 7/8" (2257) 39 15/16" (1014)									
	TW1872	TW2072 ^Ø	TW2472 ^Ø	TW2672 ^Ø	TW2872 ^Ø	TW21072 ^Ø	TW3072 ^Ø	TW3472 ^Ø	TW3872 ^Ø
7'-8 7/8" (2359) 7'-8 7/8" (2359) 41 15/16" (1065)									
	TW1876	TW2076 ^Ø	TW2476 ^Ø	TW2676 ^Ø	TW2876 ^Ø	TW21076 ^Ø	TW3076 ^Ø	TW3476 ^Ø	TW3876 ^Ø
CUSTOM HEIGHTS – 36 7/8" to 92 7/8"									

* "Window Dimension" always refers to outside frame-to-frame dimension.

* "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.

* Dimensions in parentheses are in millimeters.

Ø Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).



Custom-size windows are available in 1/8" (3) increments.

Windows 7'-4 7/8" (2257) and 7'-8 7/8" (2359) high have interior and exterior brackets. Interior brackets, located on both sides of the meeting rail, must be flipped up for proper product performance. Andersen® reinforced joining materials must be used when vertically joining 7'-4 7/8" (2257) and 7'-8 7/8" (2359) height windows.

400 SERIES TILT-WASH DOUBLE-HUNG FULL-FRAME WINDOWS




Custom Sizes and Specification Formulas




Available in $\frac{1}{8}$ " (3) increments between minimum and maximum widths and heights. Some restrictions apply; contact your Andersen supplier. For minimum rough opening dimensions for joined windows, see specific joining instruction guides. Measurement guide for custom-size windows can be found at andersenwindows.com/measure.

Tilt-Wash Double-Hung Windows


Equal



Cottage



Reverse Cottage



Clear Opening 	Width = window width - 1.852" (47) x 2 <i>Contact your Andersen supplier for clear opening height.</i>	Minimum R.O. 	Width = window width + $\frac{1}{2}$ " (51) Height = window height + 0"
Vent Opening 	<i>Vent opening formulas are dependent on window size; contact your Andersen supplier.</i>	Unobst. Glass 	Width = window width - 3.376" (86) Height: Upper Sash = upper sash height - 3.035" (77) Lower Sash = lower sash height - 3.831" (97)

* Dimensions in parentheses are in millimeters.

• **Clear Opening** formulas provide dimensions for determining area available for egress. **Vent Opening** formulas provide dimensions for determining area available for passage of air. **Minimum R.O.** (minimum rough opening) formulas provide minimum rough opening width and height dimensions. **Unobst. Glass** (unobstructed glass) formulas provide dimensions for determining area available for passage of light.

400 SERIES CASEMENT & AWNING WINDOWS

Table of Casement and Transom Window Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96

Notes on page 2 also apply to this page.

Window Dimension	1'-5"	1'-8 1/2"	2'-0 1/8"	2'-4 3/8"	2'-7 1/2"	2'-11 15/16"	2'-9 3/4"	3'-4 3/4"	4'-0"	4'-8 1/2"	
Minimum Rough Opening	1'-5 1/2" (445)	1'-9" (533)	2'-0 5/8" (625)	2'-4 7/8" (733)	2'-8" (813)	3'-0 1/2" (927)	2'-10 1/4" (870)	3'-5 1/4" (1048)	4'-0 1/2" (1232)	4'-9" (1448)	(continued)
Unobstructed Glass (casement, single sash only)	12 5/8" (321)	16 1/8" (410)	19 3/4" (502)	24" (610)	27 1/8" (689)	31 9/16" (802)	12 5/8" (321)	16 1/8" (410)	19 3/4" (502)	24" (610)	
Unobstructed Glass (transom, single sash only)	12 3/16" (310)	15 11/16" (398)	19 5/16" (491)	23 9/16" (599)	26 11/16" (678)	31 1/8" (791)	28 15/16" (735)	35 15/16" (913)	43 3/16" (1097)	51 11/16" (1313)	
CUSTOM WIDTHS – 17" to 84 5/8"											
1'-0"											
1'-0"											
CUSTOM WIDTHS – 17" to 35 15/16"											
CUSTOM HEIGHTS – 24 1/8" to 71 7/8"											
2'-0 1/8"											
2'-4 3/8"											
2'-11 15/16"											
3'-4 13/16"											
4'-0"											
4'-4 13/16"											
4'-11 7/8"											
5'-4 13/16"											
5'-11 7/8"											

*"Window Dimension" always refers to outside frame-to-frame dimension.

*"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.

• Dimensions in parentheses are in millimeters.

◊ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610) with appropriate hinge specified.




* Meet clear opening width of 20" (508) using hinge with wash mode and control bracket (bracket can be pivoted for cleaning position) and meet clear opening width of 22" (559) using hinge for widest clear opening.

** Available with straight-arm operators (hinged for widest clear opening) only.

400 SERIES CASEMENT & AWNING WINDOWS

Table of Casement and Transom Window Sizes (continued)


Scale 1/8" (3) = 1'-0" (305) – 1:96

Window Dimension	5'-2 3/4" (1594)	5'-11 5/8" (1819)	5'-1" (1549)	5'-11 7/8" (1826)	7'-0 5/8" (2149)
Minimum Rough Opening	5'-3 1/4" (1607)	6'-0 1/8" (1832)	5'-1 1/2" (1562)	6'-0 3/8" (1838)	7'-1 1/8" (2162)
Unobstructed Glass (casement, single sash only)	27 1/8" (689)	31 9/16" (802)	16 1/8" (410)	19 3/4" (502)	24" (610)
Unobstructed Glass (transom, single sash only)	57 15/16" (1472)	66 13/16" (1697)	56 3/16" (1427)	67 1/16" (1703)	79 13/16" (2027)
1'-0" (305)					
1'-0" (305)					
2'-0 1/8" (613)					
2'-4 3/8" (721)					
2'-11 15/16" (913)					
3'-4 13/16" (1037)					
4'-0" (1219)					
4'-4 13/16" (1341)					
4'-11 7/8" (1521)					
5'-4 13/16" (1646)					
5'-11 7/8" (1826)					



Custom-size windows are available in 1/8" (3) increments. Windows can also be custom sized to match standard sizes ending in a sixteenth of an inch.

Single windows only.



Choose left, right or stationary as viewed from the exterior. In addition to venting shown in table, other standard configurations are available for single, twin and triple windows. Transom (CTR) windows are stationary only.

Twin and triple windows shown have one continuous outer frame.

Transom (CTR) windows can be used over casement or awning windows, and may be rotated 90° and used as a sidelight with casement, awning or picture windows.

*"Window Dimension" always refers to outside frame-to-frame dimension.

**"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.

Dimensions in parentheses are in millimeters.

°Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610) with appropriate hinge specified.

*Meet clear opening width of 20" (508) using hinge with wash mode and control bracket (bracket can be pivoted for cleaning position) and meet clear opening width of 22" (559) using hinge for widest clear opening.


**Available with straight-arm operators (hinged for widest clear opening) only.

Custom Sizes and Specification Formulas



Available in 1/8" (3) increments between minimum and maximum widths and heights. Windows can also be custom sized to match standard sizes ending in a sixteenth of an inch. Some restrictions apply; contact your Andersen supplier. Custom sizing is available for single windows only. To achieve custom-size 2- or 3-wide combinations, join custom-size single windows. For minimum rough opening dimensions for joined windows, see specific joining instruction guides. Measurement guide for custom-size windows can be found at andersenwindows.com/measure.

Casement Windows (stationary and venting)



Clear Opening 	Width = window width – 5.81" (148) = (window width – 9.66" (245)) x 1.07 = window width – 9.70" (246) Height = window height – 4.43" (113) = window height – 4.85" (123)	Width ≥ 24 1/8" (613) (<i>hinge for widest clear opening</i>) Width ≥ 28 3/8" (721) (<i>hinge with wash mode and control bracket</i>) Width ≥ 17" (432) (<i>hinge with wash mode</i>) Height ≥ 40 13/16" (1037) and < 48" (1219); Width ≥ 28 3/8" (721) and < 31 1/2" (800) All other window heights	Min. R.O. Width = window width + 1/2" (13) Height = window height + 1/2" (13)
Vent Opening 	Width = window width – 5.81" (148) = window width – 6.10" (155) Height = window height – 4.43" (113) = window height – 4.85" (123)	Width ≥ 24 1/8" (613) (<i>hinge for widest clear opening</i>) Width ≥ 17" (432) (<i>hinge with wash mode</i>) Height ≥ 40 13/16" (1037) and < 48" (1219); Width ≥ 28 3/8" (721) and < 31 1/2" (800) All other window heights	Unobst. Gls. Width = window width – 4.40" (112) Height = window height – 4.95" (126)

* Dimensions in parentheses are in millimeters.

* **Clear Opening** formulas provide dimensions for determining area available for egress. **Vent Opening** formulas provide dimensions for determining area available for passage of air. **Min. R.O.** (minimum rough opening) formulas provide minimum rough opening width and height dimensions. **Unobst. Gls.** (unobstructed glass) formulas provide dimensions for determining area available for passage of light.

* Refer to andersenwindows.com/measure for detailed instructions on how to properly measure for custom-size windows.

400 SERIES CASEMENT & AWNING WINDOWS



Table of Awning Window Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96

Notes on page 2 also apply to this page.

Window Dimension	2'-0 1/8" (613)	2'-4 3/8" (721)	2'-7 1/2" (800)	2'-11 15/16" (913)	3'-4 13/16" (1037)	4'-0" (1219)	4'-4 13/16" (1341)	4'-11 7/8" (1521)	5'-4 13/16" (1646)	5'-11 7/8" (1819)	(continued)
Minimum Rough Opening	2'-0 5/8" (625)	2'-4 7/8" (733)	2'-8" (813)	3'-0 1/2" (927)	3'-5 3/8" (1051)	4'-0 1/2" (1232)	4'-5 3/8" (1356)	5'-0 3/8" (1534)	5'-5 3/8" (1660)	6'-0 3/8" (1832)	
Unobstructed Glass (single sash only)	19 5/16" (491)	23 9/16" (598)	26 11/16" (678)	31 1/8" (791)	36" (914)	43 3/16" (1097)	48" (1219)	55 1/16" (1399)	60" (1524)	67 1/16" (1703)	

CUSTOM WIDTHS – 24 1/8" to 71 7/8"

CUSTOM HEIGHTS – 17" to 35 15/16"

AR21	AR251	AR281	AR31	AR351	AR41	AR451	AR51	AR551	AR61
AN21	AN251	AN281	AN31	AN351	AN41	AN451	AN51	AN551	AN61
A21	A251	A281	A31	A351	A41	A451	A51	A551	A61
AW21	AW251	AW281	AW31	AW351	AW41	AW451	AW51	AW551	AW61
AX251	AX281	AX31	AX351	AX41	AX451	AX51	AX551	AX61	
			AXW281	AXW31	AXW351	AXW41	AXW451	AXW51	

CUSTOM WIDTHS – 24 1/8" to 48" venting only

CUSTOM HEIGHTS – 35 7/8" to 48" venting only

A335	A3535	AP32V	AP352V	AP42V
------	-------	-------	--------	-------

CUSTOM WIDTHS – 59 7/8" to 71 7/8" stationary only

CUSTOM HEIGHTS – 31 1/2" to 35 15/16" stationary only

AXW551	AXW61
--------	-------

Window Dimension	2'-0 1/8" (613)	2'-11 15/16" (913)	2'-11 15/16" (913)	3'-4 13/16" (1037)	4'-0" (1219)	2'-0 1/8" (613)	2'-11 15/16" (913)
Minimum Rough Opening	2'-0 5/8" (625)	3'-0 1/2" (927)	3'-0 1/2" (927)	3'-5 3/8" (1051)	4'-0 1/2" (1232)	2'-0 5/8" (625)	3'-0 1/2" (927)

A212 (A21/A21)

A312 (A31/A31)

PA3050 (AXW31/A31)

PA3550 (AXW351/A351)

PA3060 (AP32V/A31)

PA3560 (AP352V/A351)

PA4060 (AP42V/A41)

A213 (A21/A21/A21)

A313 (A31/A31/A31)

AXW312 (AXW31/AXW31)

5'-11 5/8" (1826)

6'-0 1/8" (1832)

5'-11 7/8" (1826)

6'-0 3/8" (1838)

- *"Window Dimension" always refers to outside frame-to-frame dimension.
- *"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- *Dimensions in parentheses are in millimeters.

ANDERSEN™
WINDOWS & DOORS

Scale $\frac{1}{8}"$ (3) = 1'-0" (305) – 1:96

Transom (CTR) windows
can be used over casement
or awning windows, and may
be rotated 90° and used
as a sidelight with casement,
awning or picture windows.


- Page 2 of 3

Custom Sizes and Specification Formulas



Available in $\frac{1}{8}$ " (3) increments between minimum and maximum widths and heights. Windows can also be custom sized to match standard sizes ending in a sixteenth of an inch. Some restrictions apply; contact your Andersen supplier. Custom sizing is available for single windows only. To achieve custom-size 2- or 3-wide combinations, join custom-size single windows. For minimum rough opening dimensions for joined windows, see specific joining instruction guides. Measurement guide for custom-size windows can be found at andersenwindows.com/measure.

Awning Windows (stationary and venting)

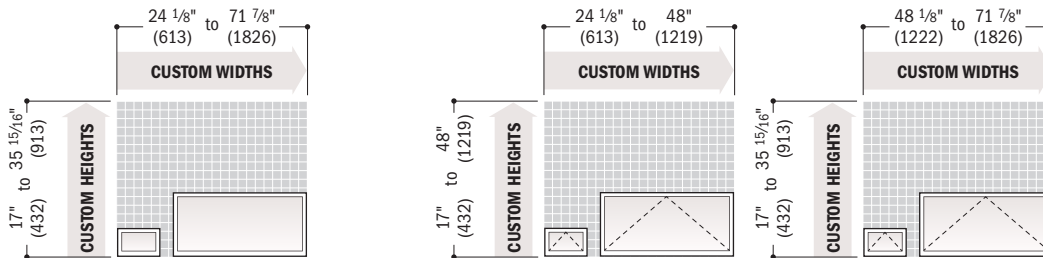

Clear Opening 	Width = window width – 4.53" (115) Depth = 6.38" (162) = 6.44" (164) = 6.50" (165) <i>Height ≥ 17" (432) and < 20 1/2" (521)</i> <i>Height ≥ 20 1/2" (521) and < 24 1/8" (613)</i> <i>All other window heights</i>	Min. R.O. Width = window width + 1/2" (13) Height = window height + 1/2" (13)
Vent Opening 	Width = window width – 4.53" (115) Depth = 6.38" (162) = 6.44" (164) = 6.50" (165) <i>Height ≥ 17" (432) and < 20 1/2" (521)</i> <i>Height ≥ 20 1/2" (521) and < 24 1/8" (613)</i> <i>All other window heights</i>	Unobst. Gls. Width = window width – 4.81" (122) Height = window height – 4.51" (115)

• Dimensions in parentheses are in millimeters.

• **Clear Opening** formulas provide dimensions for determining area available for egress. **Vent Opening** formulas provide dimensions for determining area available for passage of air. **Min. R.O.** (minimum rough opening) formulas provide minimum rough opening width and height dimensions. **Unobst. Gls.** (unobstructed glass) formulas provide dimensions for determining area available for passage of light.

• Refer to andersenwindows.com/measure for detailed instructions on how to properly measure for custom-size windows.