POLLACK RESIDENCE

50 APPLETON PLACE, DOBBS FERRY, NY 10522

CHRISTINAGRIFFINARCHITECT

12 Spring Street, Hastings-on-Hudson, NY 10706





AHRB SUBMISSION 07/29/21

DATES

INSULATION AND FENESTRATION

REQUIREMENT BY COMPONENT

SEVERE

N/A 2000 51.6

YES

NO

30 PSF 120-


MPH

YES

GLAZED FENESTRATION SKYLIGHT WOOD FRAME CLIMATE CEILING PLANNING BOARD SUBMISSION 07-29-21 FENESTRATION U-FACTOR R-VALUE WALL R-VALUE ZONE U-FACTOR^b the contractor shall be responsible to (a) protect all shipments. The Architect reserves the right to 1. These documents remain the exclusive property of the accuracy or the correctness of any of the indicated before ordering any material or doing any work. Energy Notes R-Values & U-Factors SHGCb,e Architect, and may not be used for any purpose interior spaces from the area of renovation, and (b) disapprove such substitution, provided in his sole 2020 Residential code of NYS - Climate Zone 4A 20. Contractor is to design and install adequate and code 0.32 0.55 0.40 49 20 or 13+5 ^c whatsoever without written consent of the Architect. opinion, the item offered is not equal or detailed on the broom sweep all areas at end of each work day. Required Proposed 13. Contractors shall be responsible for protection of all approved shoring and bracing where needed to safely drawings, which requires any redesign of the structure, Ceiling R-49 2. All construction shall comply fully with the 2020 existing and new conditions and materials with and complete structural work. Contractor to assume full and 28. The contractor shall do all the cutting, fitting & patching MASS WALL SLABd R-VALUE CRAWL SPACE **BASEMENT^c FLOOR** partitions , piping, redesign, and all new drawings and Wall R-20 R-21 adjacent to the construction area. Any damage caused R-VALUE¹ R-VALUE WALL R-VALUE WALL R-VALUE Residential code of NYS, local building code, fire sole responsibility for structural adequacy of the shoring that may be required to make several parts of the work & DEPTH detailing required therefore shall, with the approval of the Glazing 0.32 U value 0.32 U value by the execution of the work indicated or implied herein and for any injuries, damages, cracks, or defects caused come together properly, and to fit his work, and/or department regulations, and all other agencies having Architect, be prepared by the contractor at his own 8/13(g) 10, 2FT(d) R-19 R-19 19 10/13(c) 10/1**3**(c) jurisdiction over project. shall be repaired or replaced to the Owner's satisfaction. by shoring or bracing, and shall repair all such damage receive, or be received by the work of others, as shown, LIST of DRAWINGS or as reasonably implied on the drawings. at his sole expense 3. Approved stamped set of building plans must be present 14. All construction sites shall conform to the 2020 New 34. All work shall be installed so that all parts required are 5750 Degree Days on site for all inspections. York State Property Maintenance Code. All rubbish 21. The Architect is not responsible for workmanship, 29. New and existing work shall come together in a readily accessible for inspection, operation, maintenance 15% Maximum Glazing R-values are minimums. U-factors and SHGC are maximums. Where insulation is installed in a cavity that is less than the label or garbage and construction debris shall be disposed of in construction methods, or any omissions or derivations seamless fashion.All new or modified surfaces shall be 4. A current Westchester County licensed and insured and repair. Minor deviations from the drawings may be R402.2.1 CEILINGS WITH ATTIC SPACES design thickness of the insulation, the installed R-value of the insulation shall be not less than the R-value specified in the table. finished including, but not limited to taping, spackling and an onsite dumpster or removed off site immediately. from the drawings during construction. made to accomplish this, but changes of magnitude shall * Installing R-38 over 100% of the ceiling area requiring contractor must be on file with current building permit The fenestration U-factor column excludes skylights. The SHGC column applies to all glazed fenestration. GENERAL NOTES, Materials shall be stacked in orderly fashion as to not 22.Materials and products indicated on drawings shall be until Certificate of Occupancy is issued. If contractor of not be made without prior written approval from the CLIMATIC & GEOGRAPHIC CRITERIA, insulation shall be deemed to satisfy the requirement for create a blight on the community. The village right of "10/13" means R-10 continuous insulation on the interior or exterior of the home or R-13 cavity insulation on the interior of the installed in accordance with manufacturer's 30. All insulation to comply with the Energy Efficiency record has been removed from the project, a stop work DATES, LIST OF DRAWINGS R-49 insulation wherever the full height of uncompressed way must be kept clear and maintained at all times. basement wall. "15/19" means R-15 continuous insulation on the interior or exterior of the home or R-19 cavity insulation at the Certificate required by 401.3 2020 Energy Conservation order will be issued untill a new Westchester County R-38 insulation extends over the wall top plate at eaves. interior of the basement wall. Alternatively, compliance with "15/19" shall be R-13 cavity insulation on the interior of the basement 35. Upon completion of the work, the entire project is to be 15. General contractor shall be responsible for the removal 23. The drawings and notes are intended to be complete. Construction Code of New York, prepared by the licensed and insured contractor is retained. wall plus R-5 continuous insulation on the interior or exterior of the home. completely cleaned and the site restored to existing SITE PLAN, ZONING COMPLIANCE, of construction debris, rubbish and offsite disposal in a R-5 insulation shall be provided under the full slab area of a heated slab in addition to the required slab edge insulation R-value for Should anything be omitted from the drawings necessary 5. General Contractor shall carry property damage I, Christina Griffin, Architect A.I.A., hereby states that I have condition, including but not limited to the following. LOCATION MAP responsible manner. slabs. as indicated in the table. The slab edge insulation for heated slabs shall not be required to extend below the slab. insurance, public liability insurance, workman's to the proper construction of the work herein described, it 31.If blown or sprayed insulation used, Installer of insulation prepared these plans and specifications to the best of my Reserved. a) Complete sweeping of all areas, and removal of all knowledge in compliance with all the requirements of the compensation, auto insurance, and general liability as 16. The contractor shall obtain all inspections, approvals and shall be the duty of the contractor to notify the Architect. to submit insulation certification to include the installed rubbish and debris, except that caused by the owner 2020 Residential code of NYS. Reserved. BASEMENT & FIRST FLOOR DEMOLITION PLAN required by Federal, State, and Local Codes and as permits, and pay all necessary permit fees required by The builder shall visit the site and inform the Architect of thickness of the area covered and R-value of the Alternatively, insulation sufficient to fill the framing cavity and providing not less than an R-value of R-19. or others doing N.I.C. work. the local building department and all other agencies any discrepancies of field conditions that may interfere installed thickness shall be listed on the certificate. The The first value is cavity insulation, the second value is continuous insulation. Therefore, as an example, "13+5" means R-13 cavity Owner requires. SECOND FLOOR DEMOLITION PLAN insulation installer shall sign, data and post the certificate b) Removal of all labels from glass, fixtures, and insulation plus R-5 continuous insulation having jurisdiction over the project, such as plumbing, with the total completion of all work included within the 6. Licensed electrician to file separate electrical permit. Mass walls shall be in accordance with Section R402.2.5. The second R-value applies where more than half of the insulation is on electrical & HVAC, except for the building permit, which contract and verify all conditions prior to the ordering of equipment, etc. and spray cleaning of glass and in a conspicuous location on the job site per N1101.5 of 7. Licensed plumber to file separate plumbing permit. the interior of the mass wall BASEMENT & FIRST FLOOR PLAN shall be obtained by the Architect. The contractor shall materials and the start of construction. the 2020 Residential Code of New York State and obtain the certificate of occupancy for the project when submit an original signed copy for the Building 8. All health, safety, fire, zoning and environmental c) Removal of stains, and paint from glass, hardware, 24. Minor details not usually shown or specified, but SECOND FLOOR PLAN construction is complete. Departments records. regulations shall be adhered to at all times by the Owner necessary for proper and acceptable construction, finished flooring, cabinets, etc. NORTH ELEVATION, WEST ELEVATION & and/or occupant. DESIGN REQUIREMENTS for the 2020 RESIDENTIAL 17. Contractor shall keep work site free from debris and installation or operation of any part of the work shall be 32.All work shall be guaranteed for one year after final d) Final cleaning of all chrome and aluminum metal accumulated refuse, and shall have sole responsibility 9. The contractor shall become familiar with conditions of included in the work the same as specified or indicated. payment. The general contractor is to furnish written PHOTOS OF EXISTING HOUSE CODE OF NEW YORK STATE CLIMATIC & for protecting all dangerous areas from entry by guarantees on his work and all subcontractors work the site, and the work as shown on the construction 25. The contractor shall supervise and direct the work using e) Restoration of property by returning shrubs to original unauthorized parties. against defects resulting from the use of inferior GEOGRAPHIC DESIGN CRITERIA SOUTH ELEVATION & EAST ELEVATION, documents, prior to submitting a bid for construction. his best skill and attention, he shall be solely responsible locations, filling of all ruts and raked topsoil and materials, equipment, or workmanship as determined 18. Drawings may be rough scaled for estimating and for all construction means, methods, sequences and 10. Contractors shall coordinate all work procedures and WINDOW SCHEDULE repairs to damaged blacktop. solely by the Architect. All such defects are to be general purposes, but are not to be scaled for procedures and for coordination of all portions of the working hours with local authorities, neighborhood WIND DESIGN replaced or repaired, complete with labor and materials, 36. Finish materials and paint colors shall be reviewed and SUBJECT TO DAMAGE FROM EXISTING AND PROPOSED STREETSCAPE construction locations, dimensions, or any other associations, and any other governing authorities. at no cost to owner. approved by the homeowner. purposes. Dimensions shown shall govern over ICE SHIELD AIR MEAN UNDERLAY FLOOD FREEZING ANNUAL 26. The use of the words "provide" or "provided" in 11. The contractor shall be responsible for providing all labor GROUND SPEED TOPO SPECIAL WIND measurements scaled from plans. Wall dimensions are 33. Substitutions of equipment or materials other than those 37. The Architect assumes no responsibility for the accuracy (MPH) EFFECTS WIND BORNE REGION DEBRIS CATAGOR connection with any item specified is intended to mean and materials to complete the project, in accordance with TERMITE REQUIRED HAZARDS INDEX given to finished surfaces. Contractor to consult with the shown on the drawings or in the specifications shall be or correctness of any material or drawings prepared by CATAGORY WI that such item be furnished and installed and connected the construction documents, tested and ready for Architect for questions regarding final dimensions and made only upon approval of the Architect or owner as others and provided to the Architect. owner's use. where required. noted on the drawings or in these specifications. The 27. Contractor shall maintain a sealed enclosure between 12. All indicated Survey material is for general reference contractor shall submit his substitution for approval 19. All dimensions and conditions shown and assumed on work area and other areas of the residence. In addition, only. The Architect assumes no responsibility for the before releasing any order for fabrication and/or

GENERAL NOTES

the drawings must be verified at the site by contractor

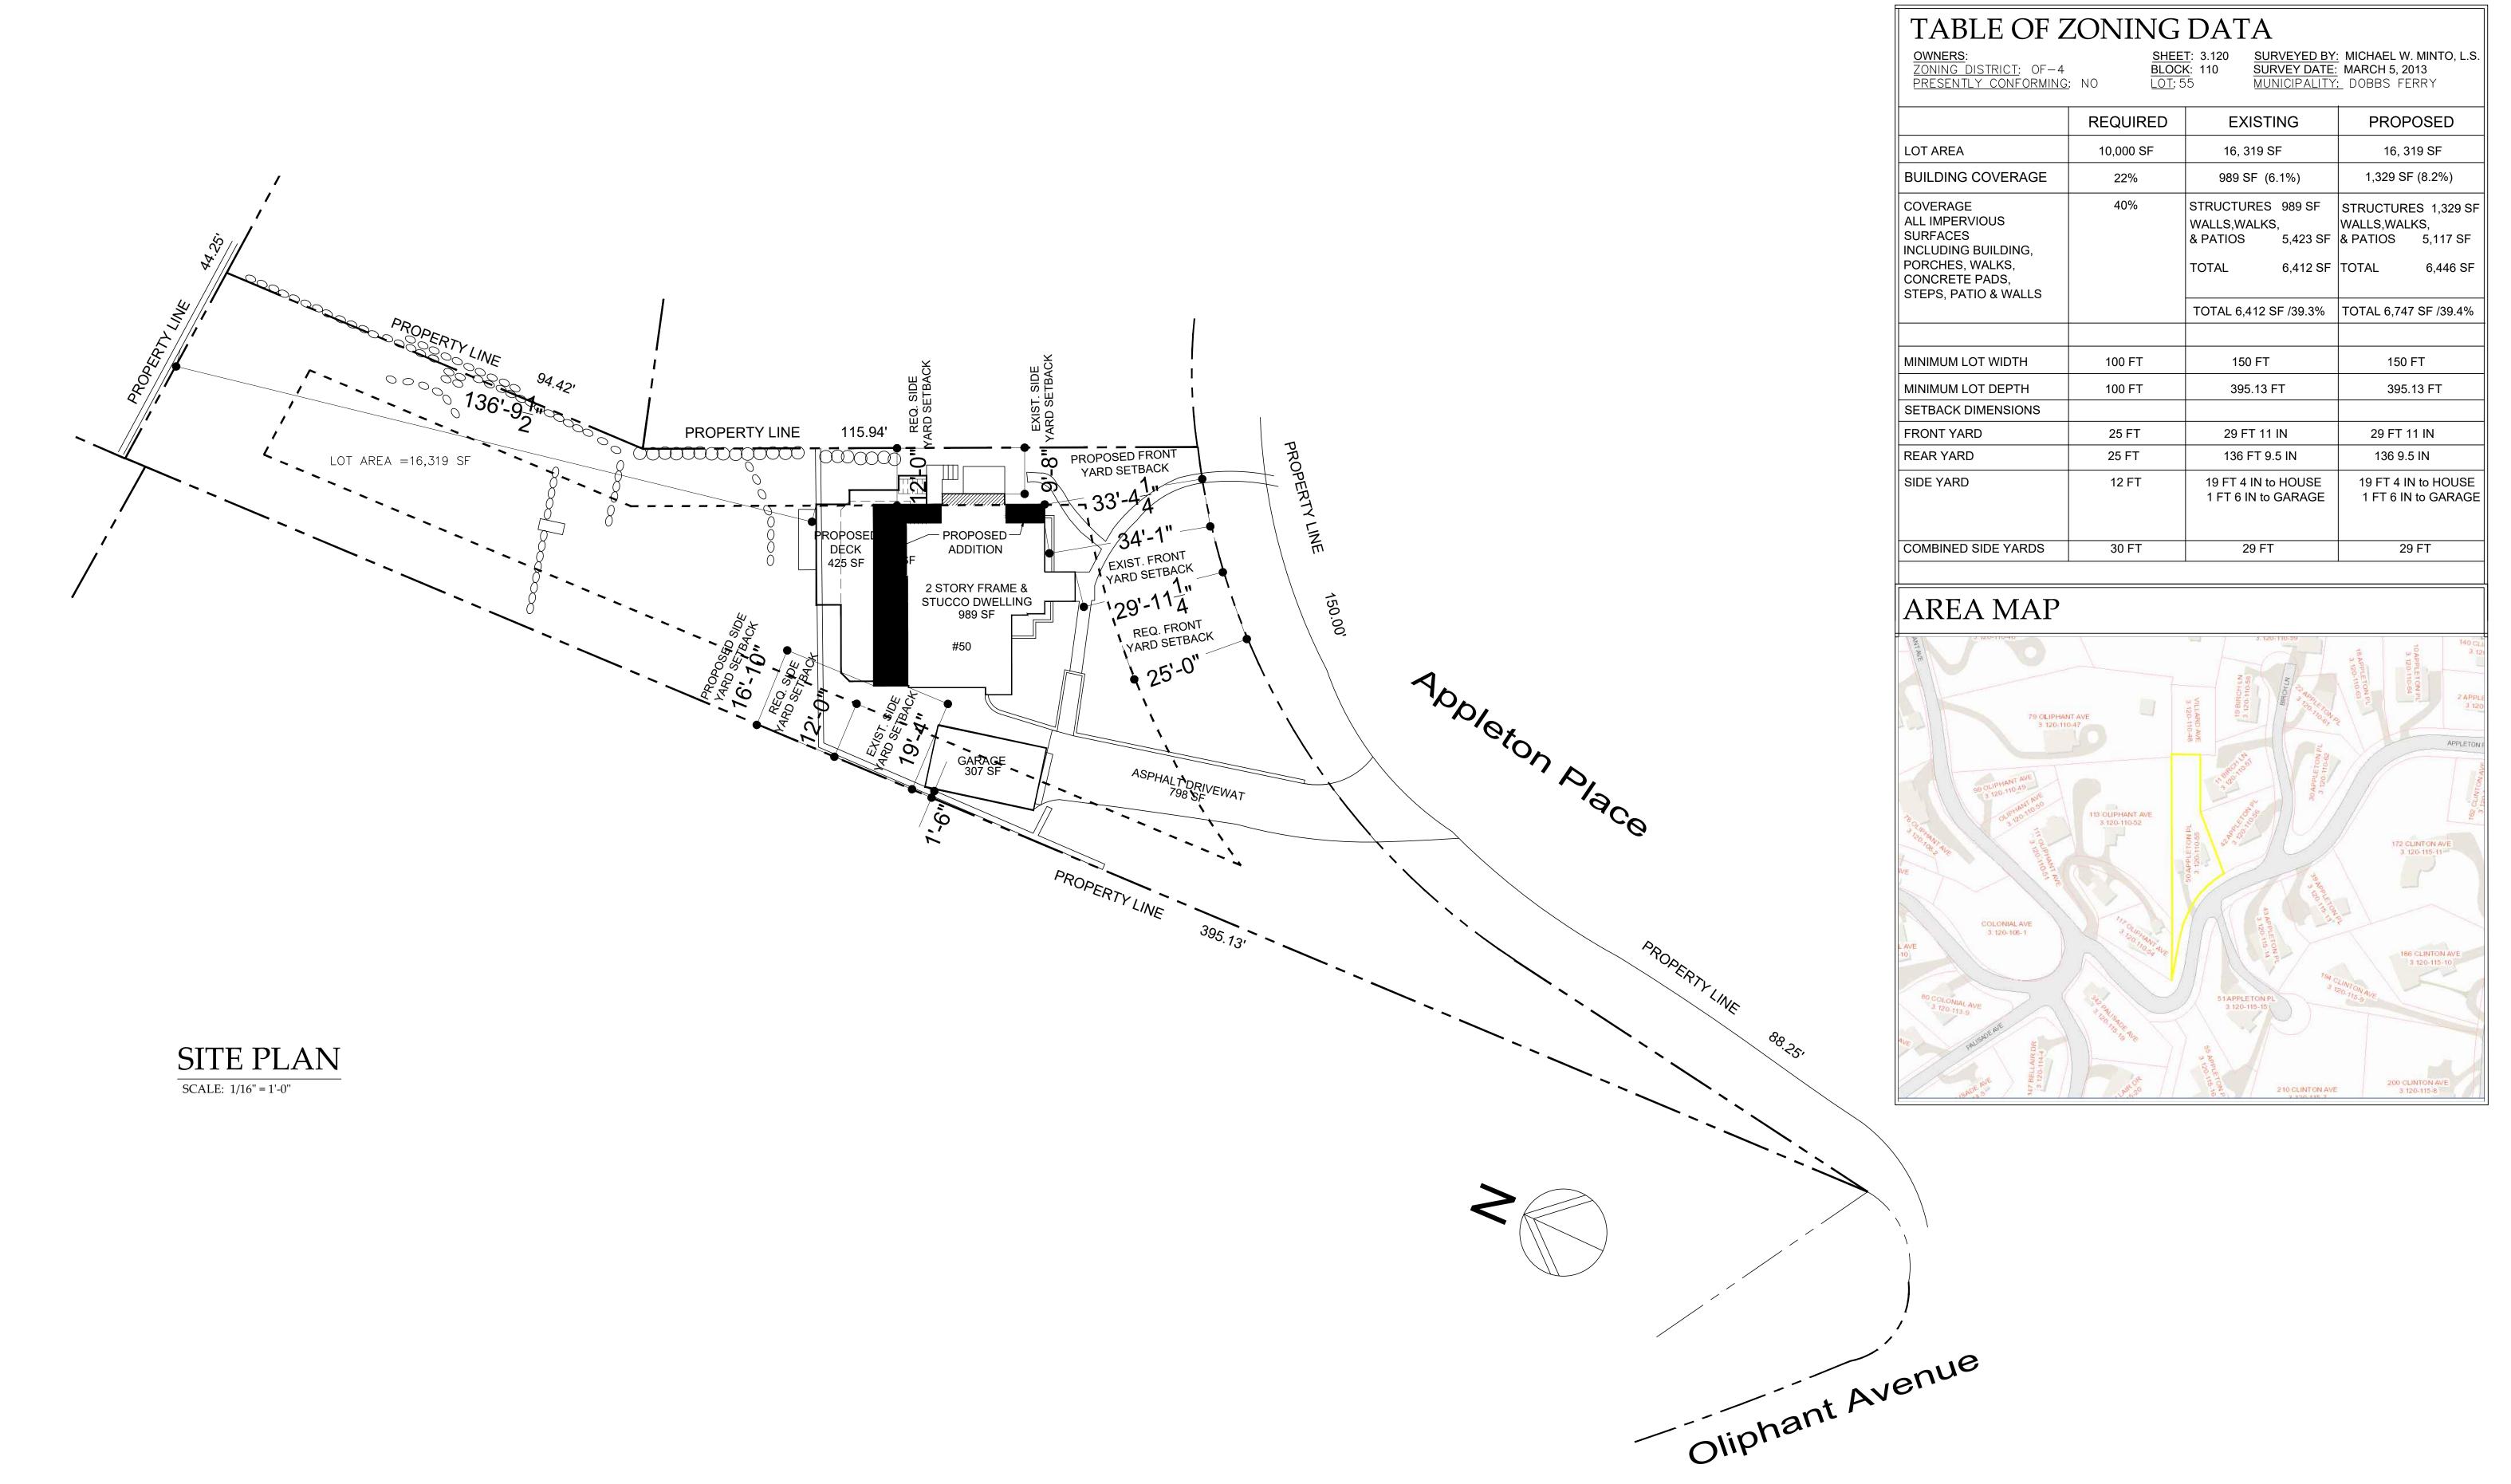



RENOVATIONS TO THE
POLLACK- REISINGER RESIDENCE
50 APPLETON PLACE DOBBS FERRY, NY 10522


y GRIFFIN ARCHITECT PC Street

-on-Hudson, New York 107 0799 tel 914.478.0806 fax stinagriffinarchitect.com

SSION 07-29-21


S-1



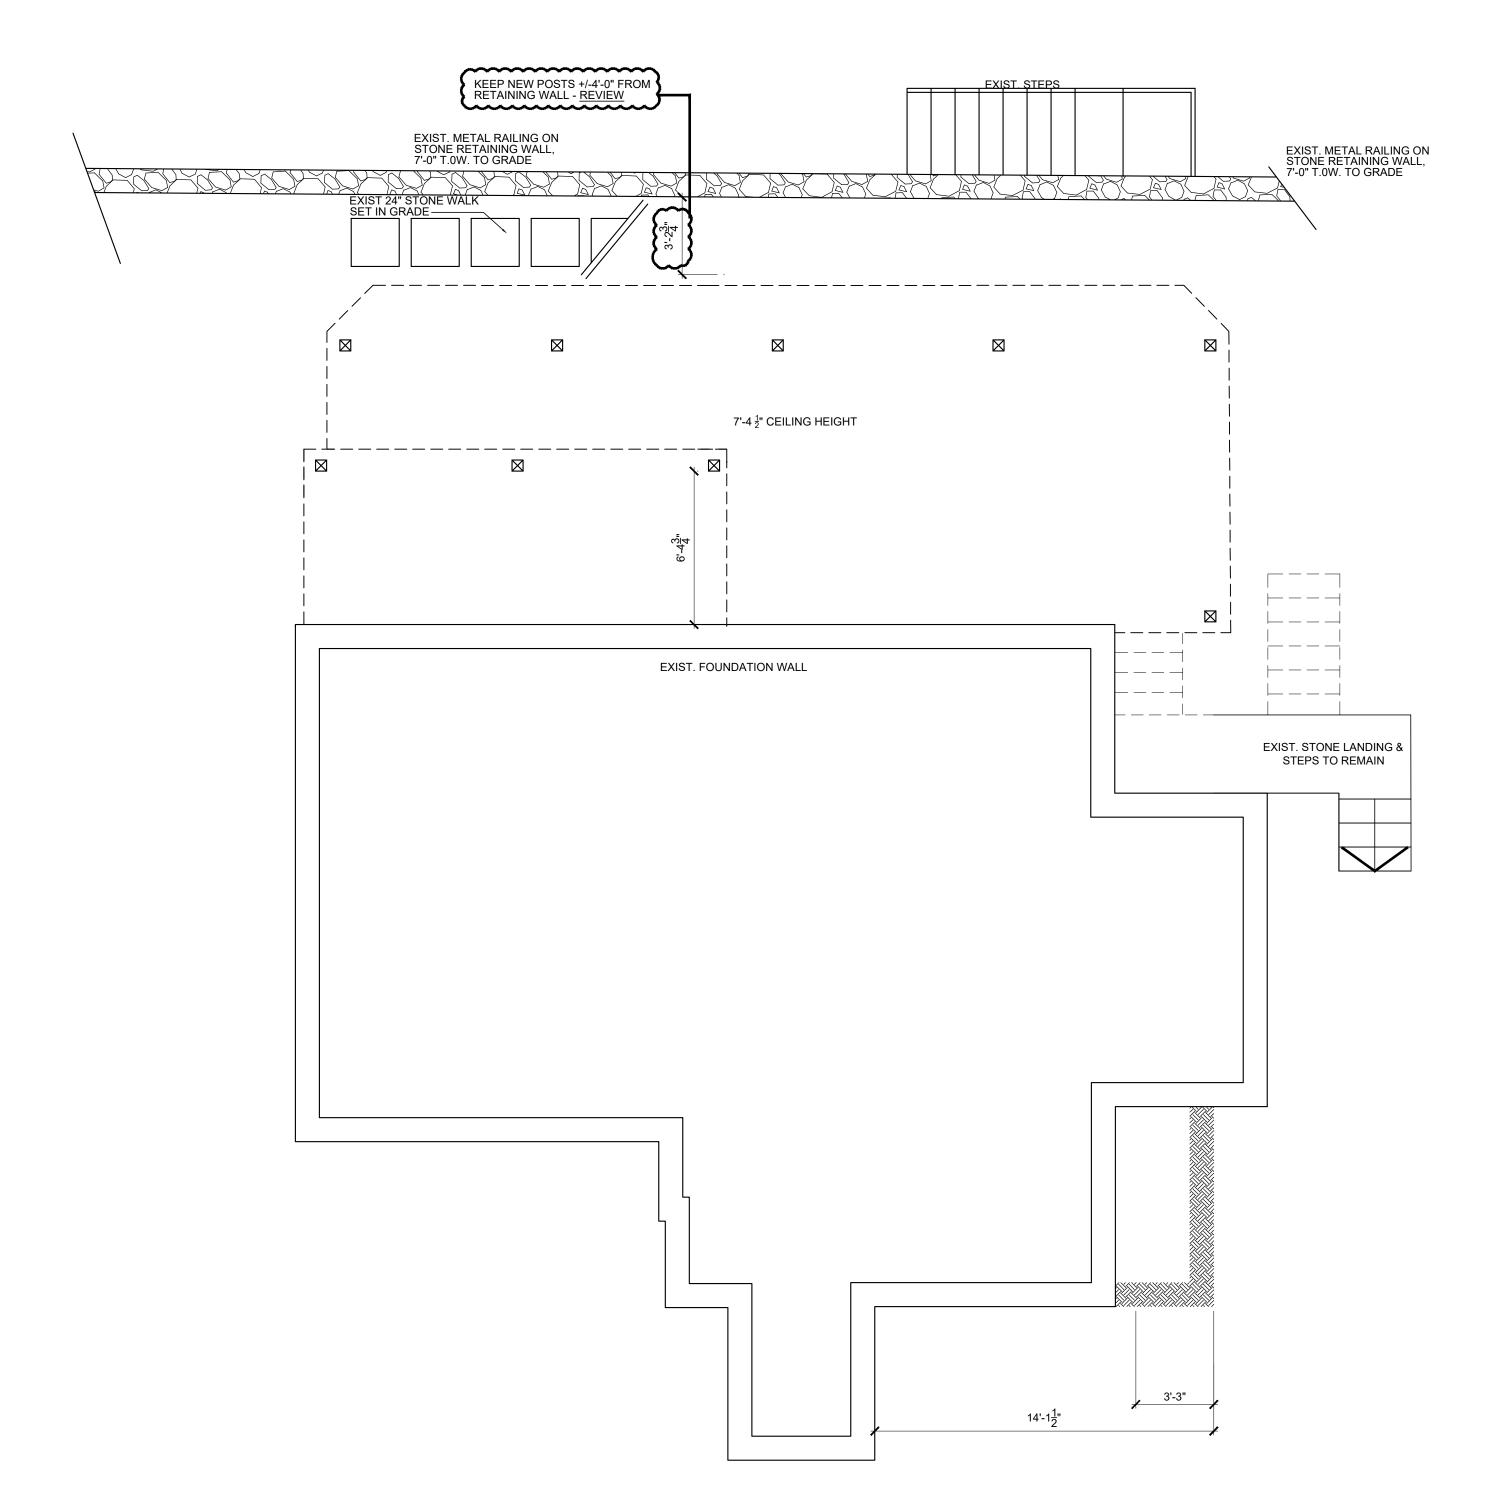


BASEMENT DEMOLITION PLAN

SCALE: 1/4" = 1'-0"

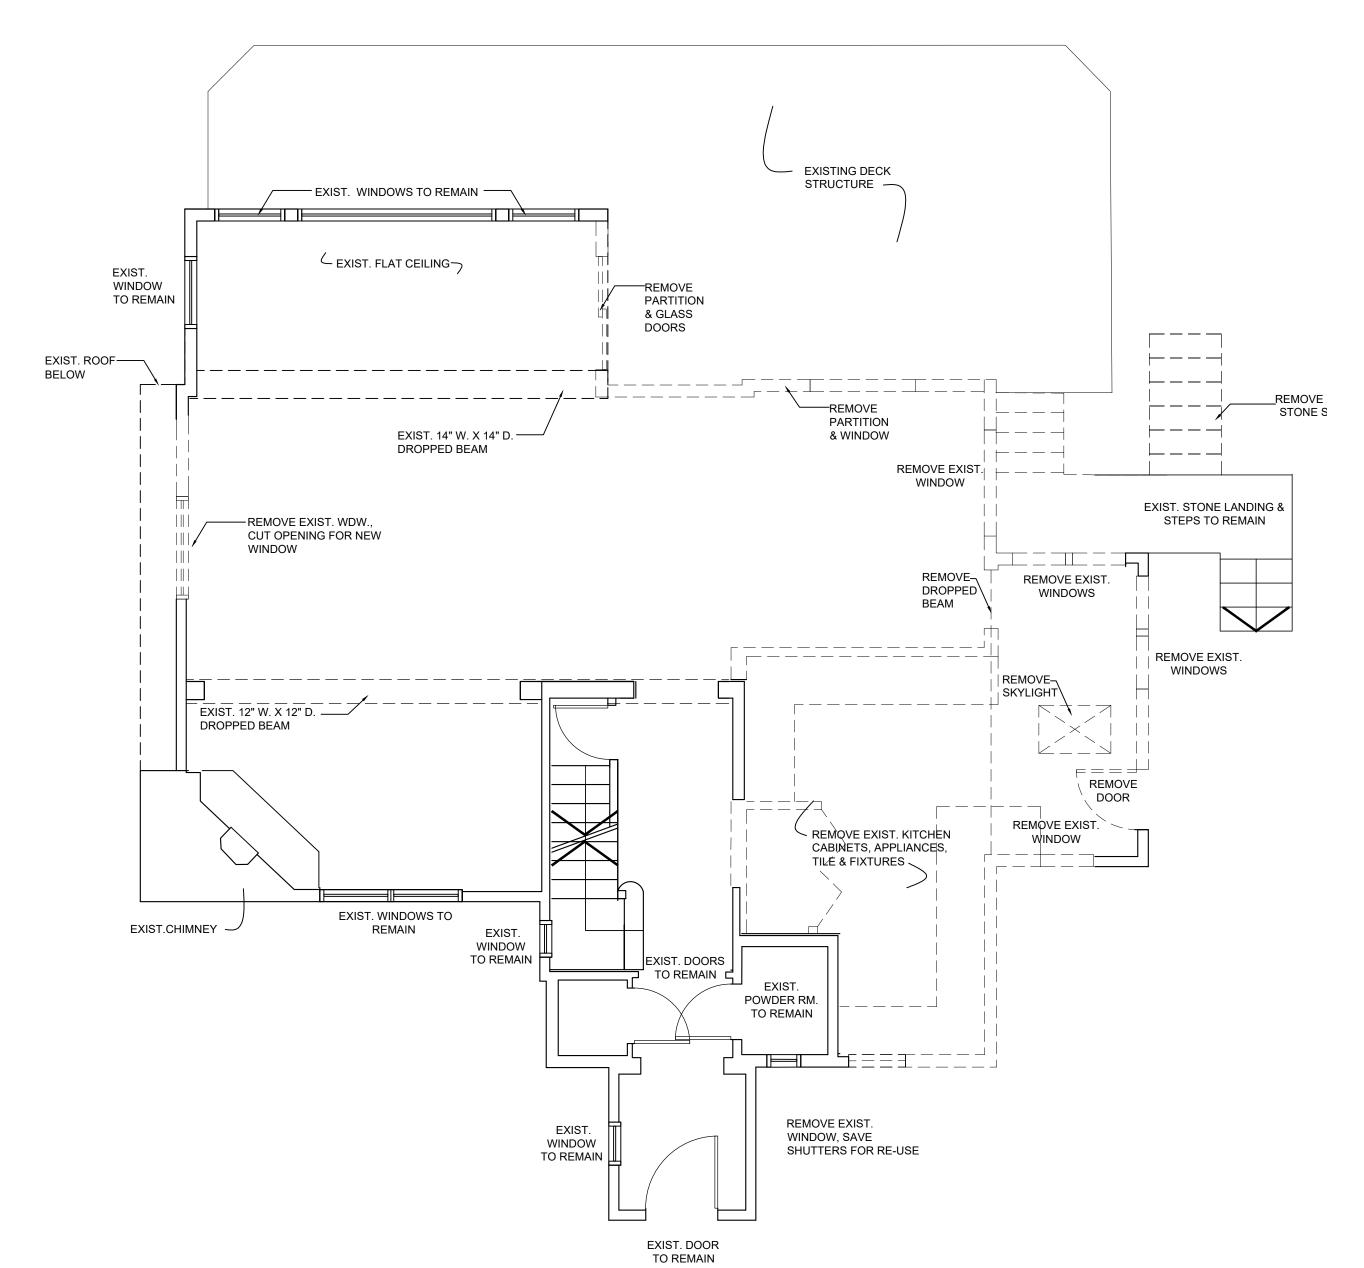

FIRST FLOOR DEMOLITION PLAN SCALE: 1/4" = 1'-0"

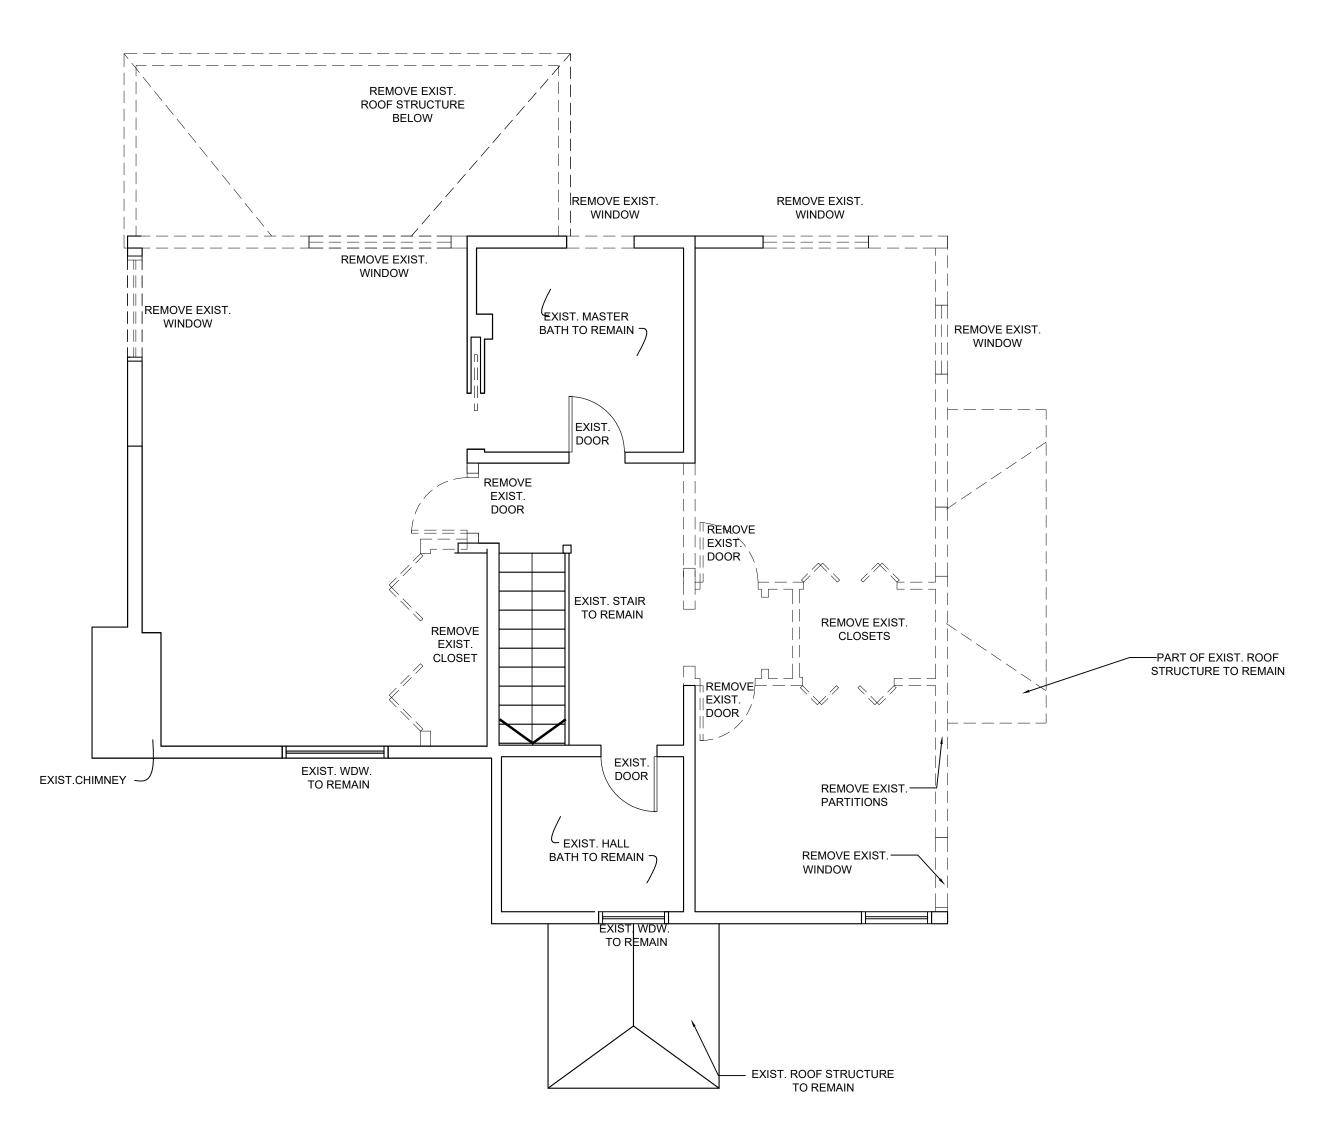

SECOND FLOOR DEMOLITION PLAN

SCALE: 1/4" = 1'-0"

Proming Title

FLOOR PLAN

AHRE SUBMISSION 0729-21

12 Spring Street

Hostings-on-Hudson, Ne

Hostings-on-Hudson, Ne

State


AS SHOWN


Www.christinggriffingrichit.





D-2



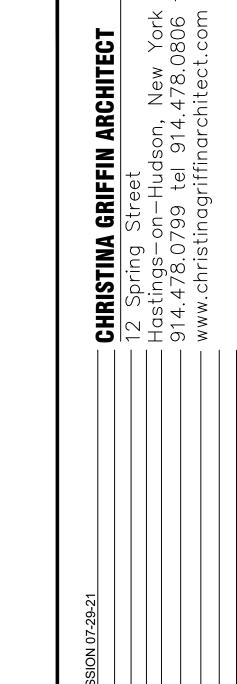

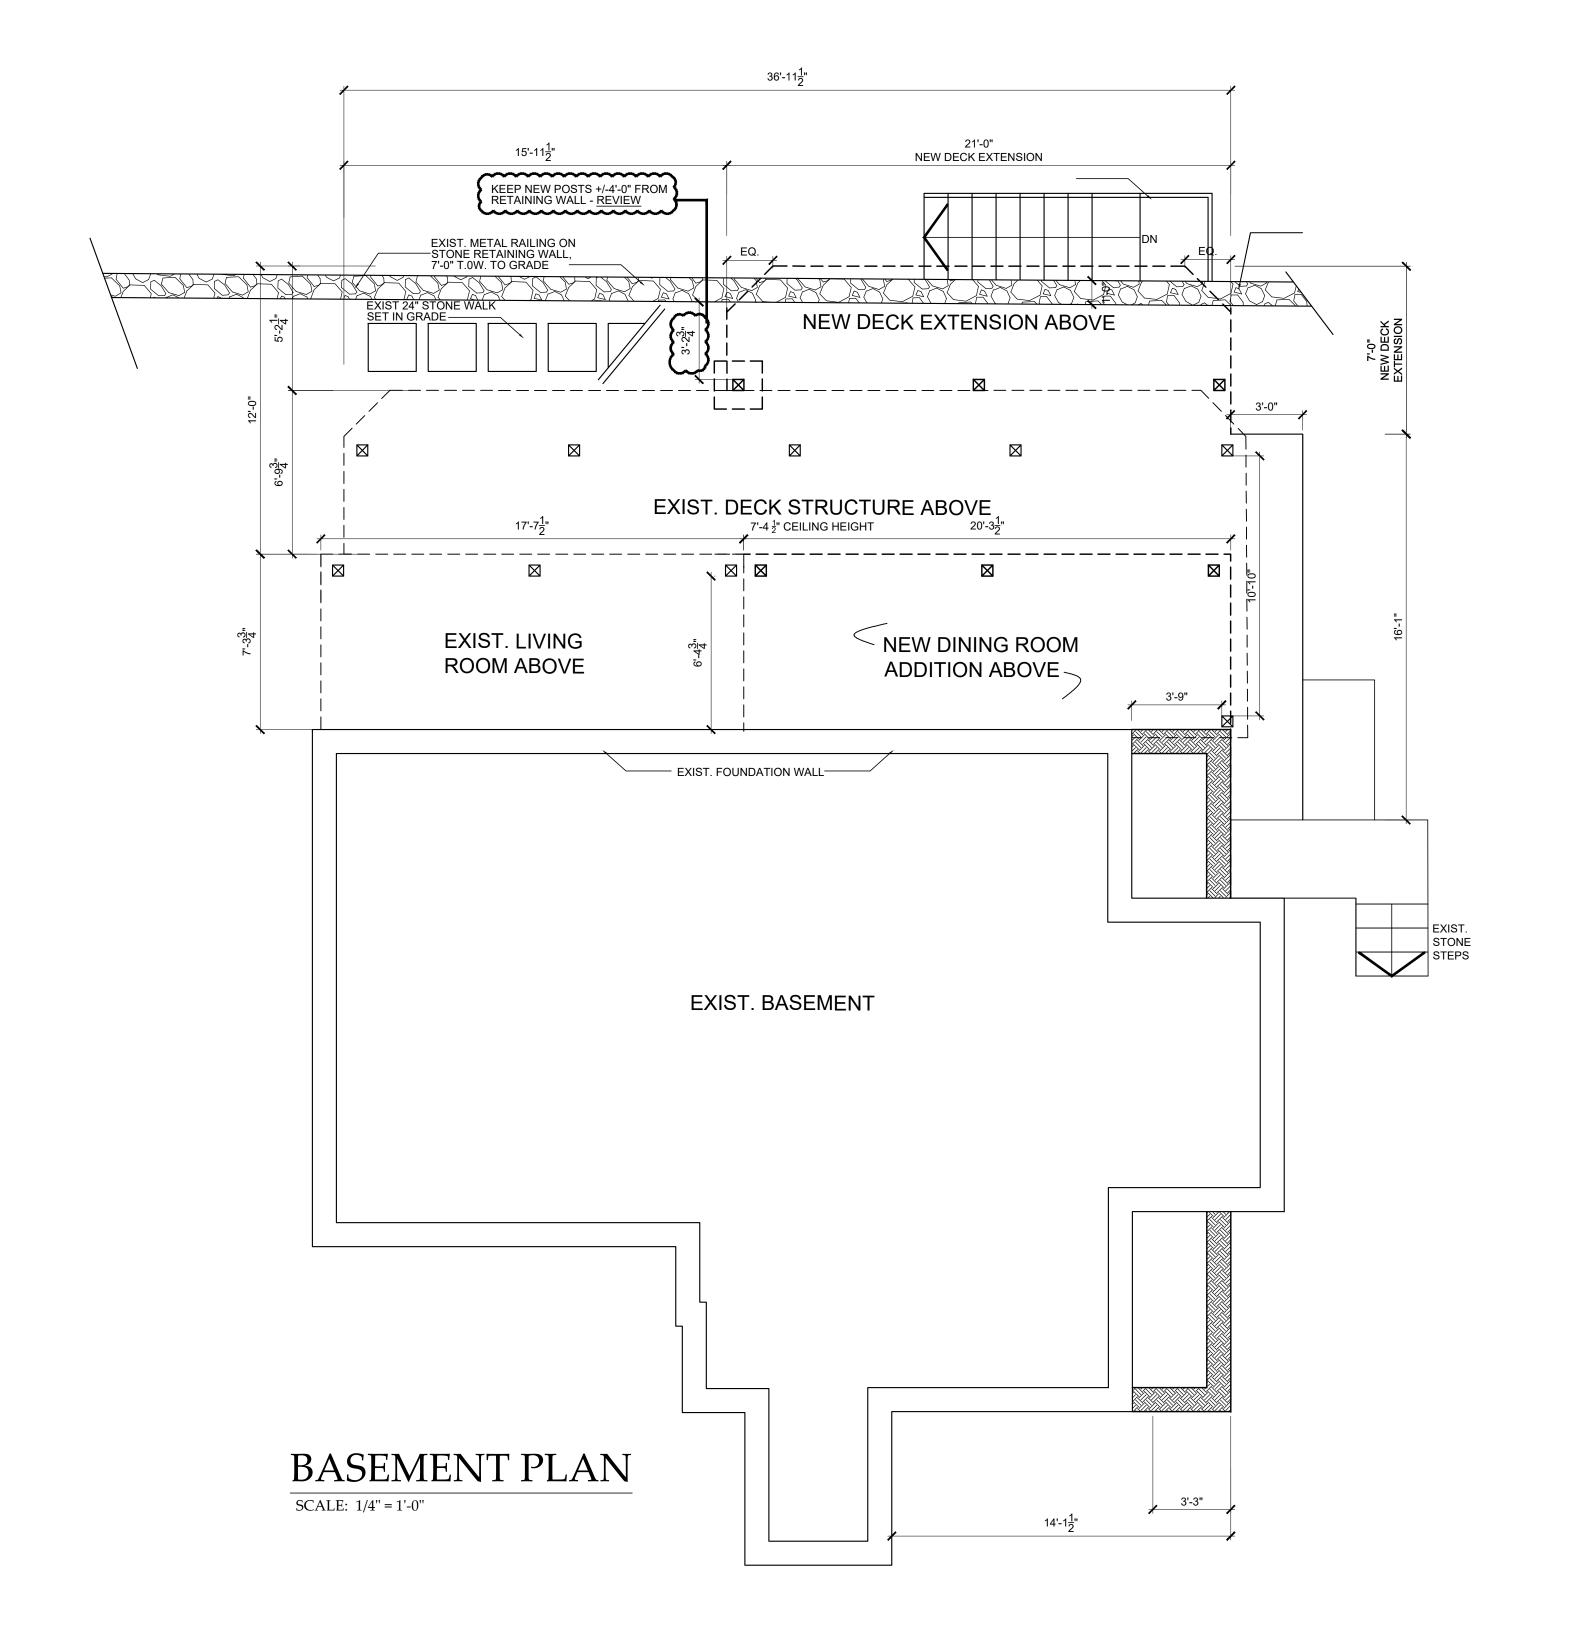

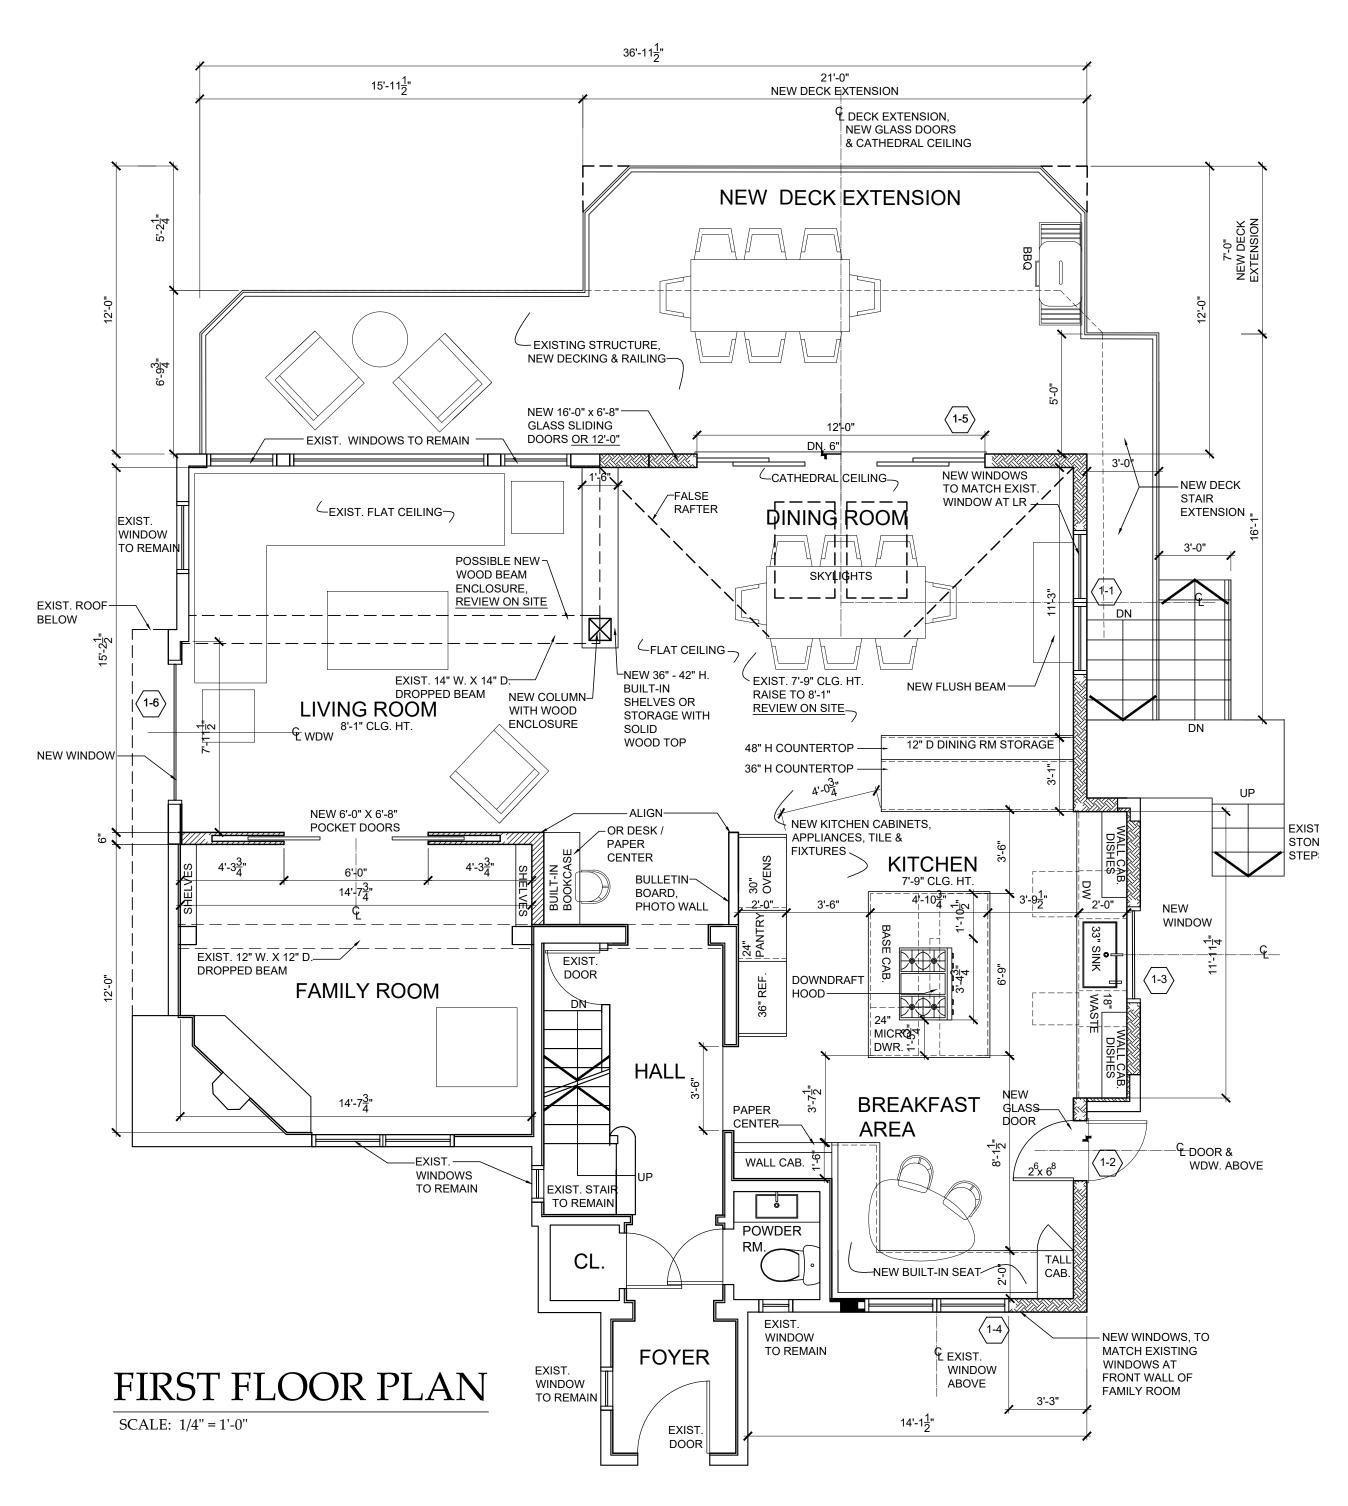

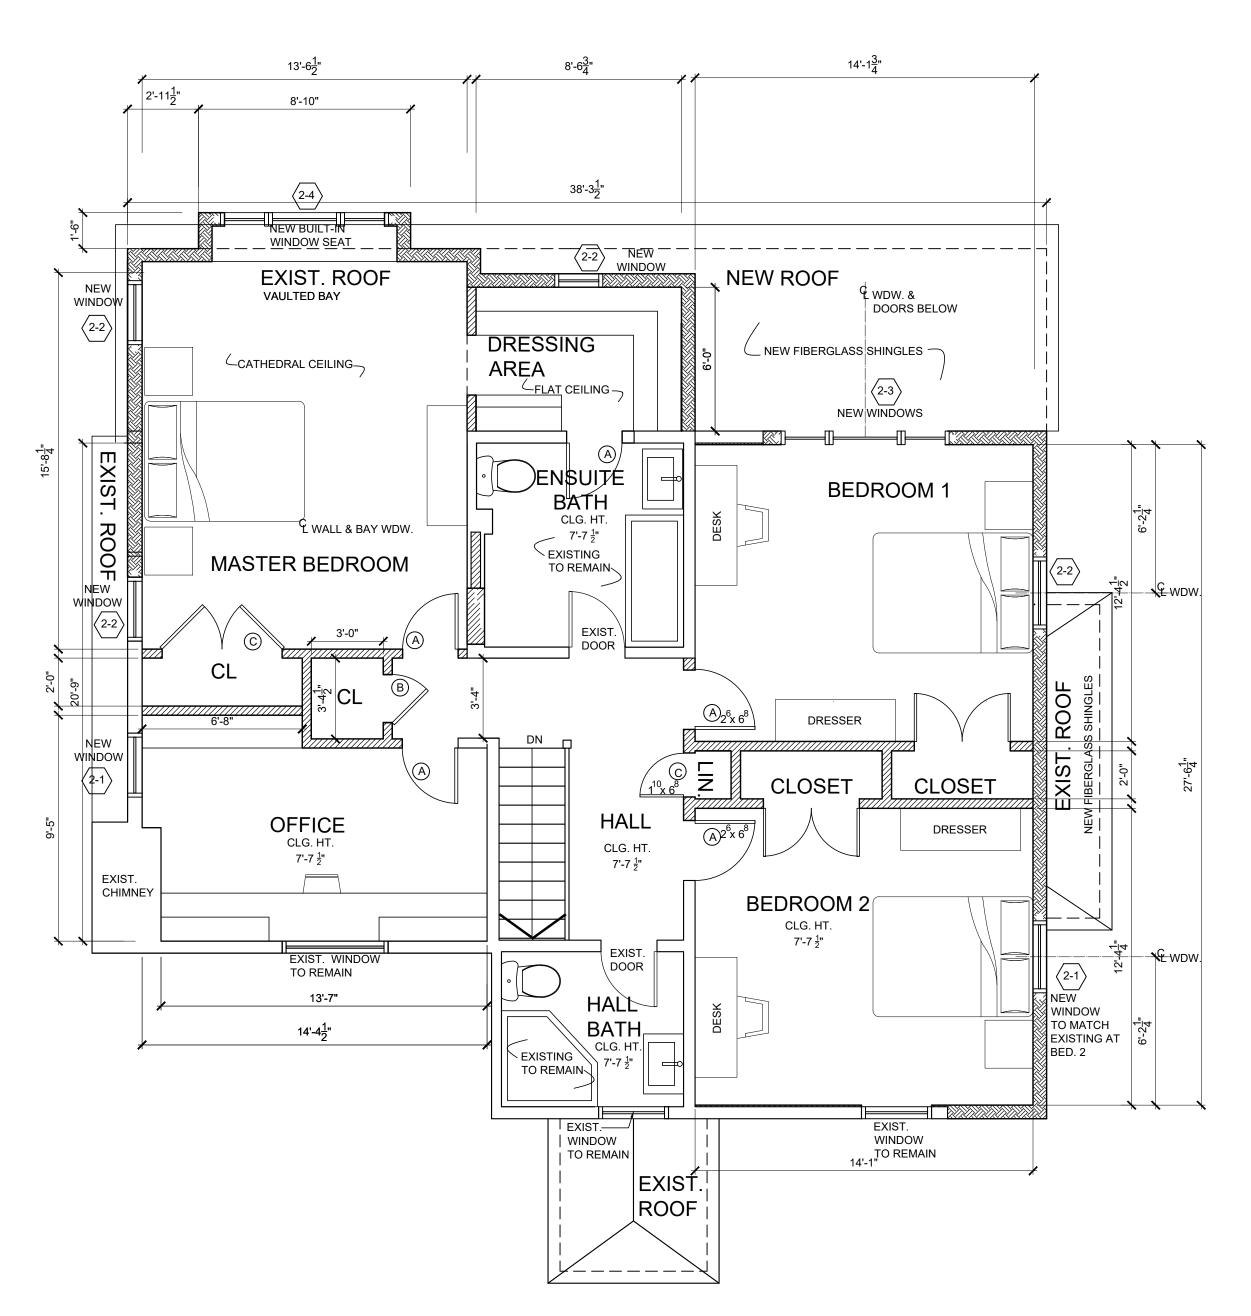

SECOND FLOOR PLAN

SCALE: 1/4" = 1'-0"

Proving Tile AHRB SUBMISSION 07:29:21
FLOOR PLAN AHRB SUBMISSION 07:29:21
To Spring Street
Hastings-on-Hudson
Steller
AS SHOWN
Www.christinggriffingr



A-2

10

SIDEN

GE

REIS

107(fax


on, New York 114.478.0806 architect.com


RENOV

ARCHITECT






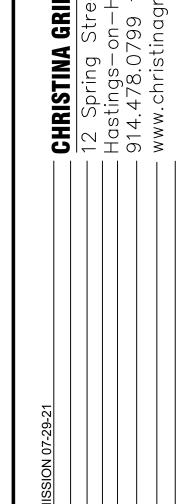

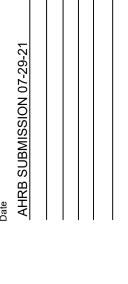





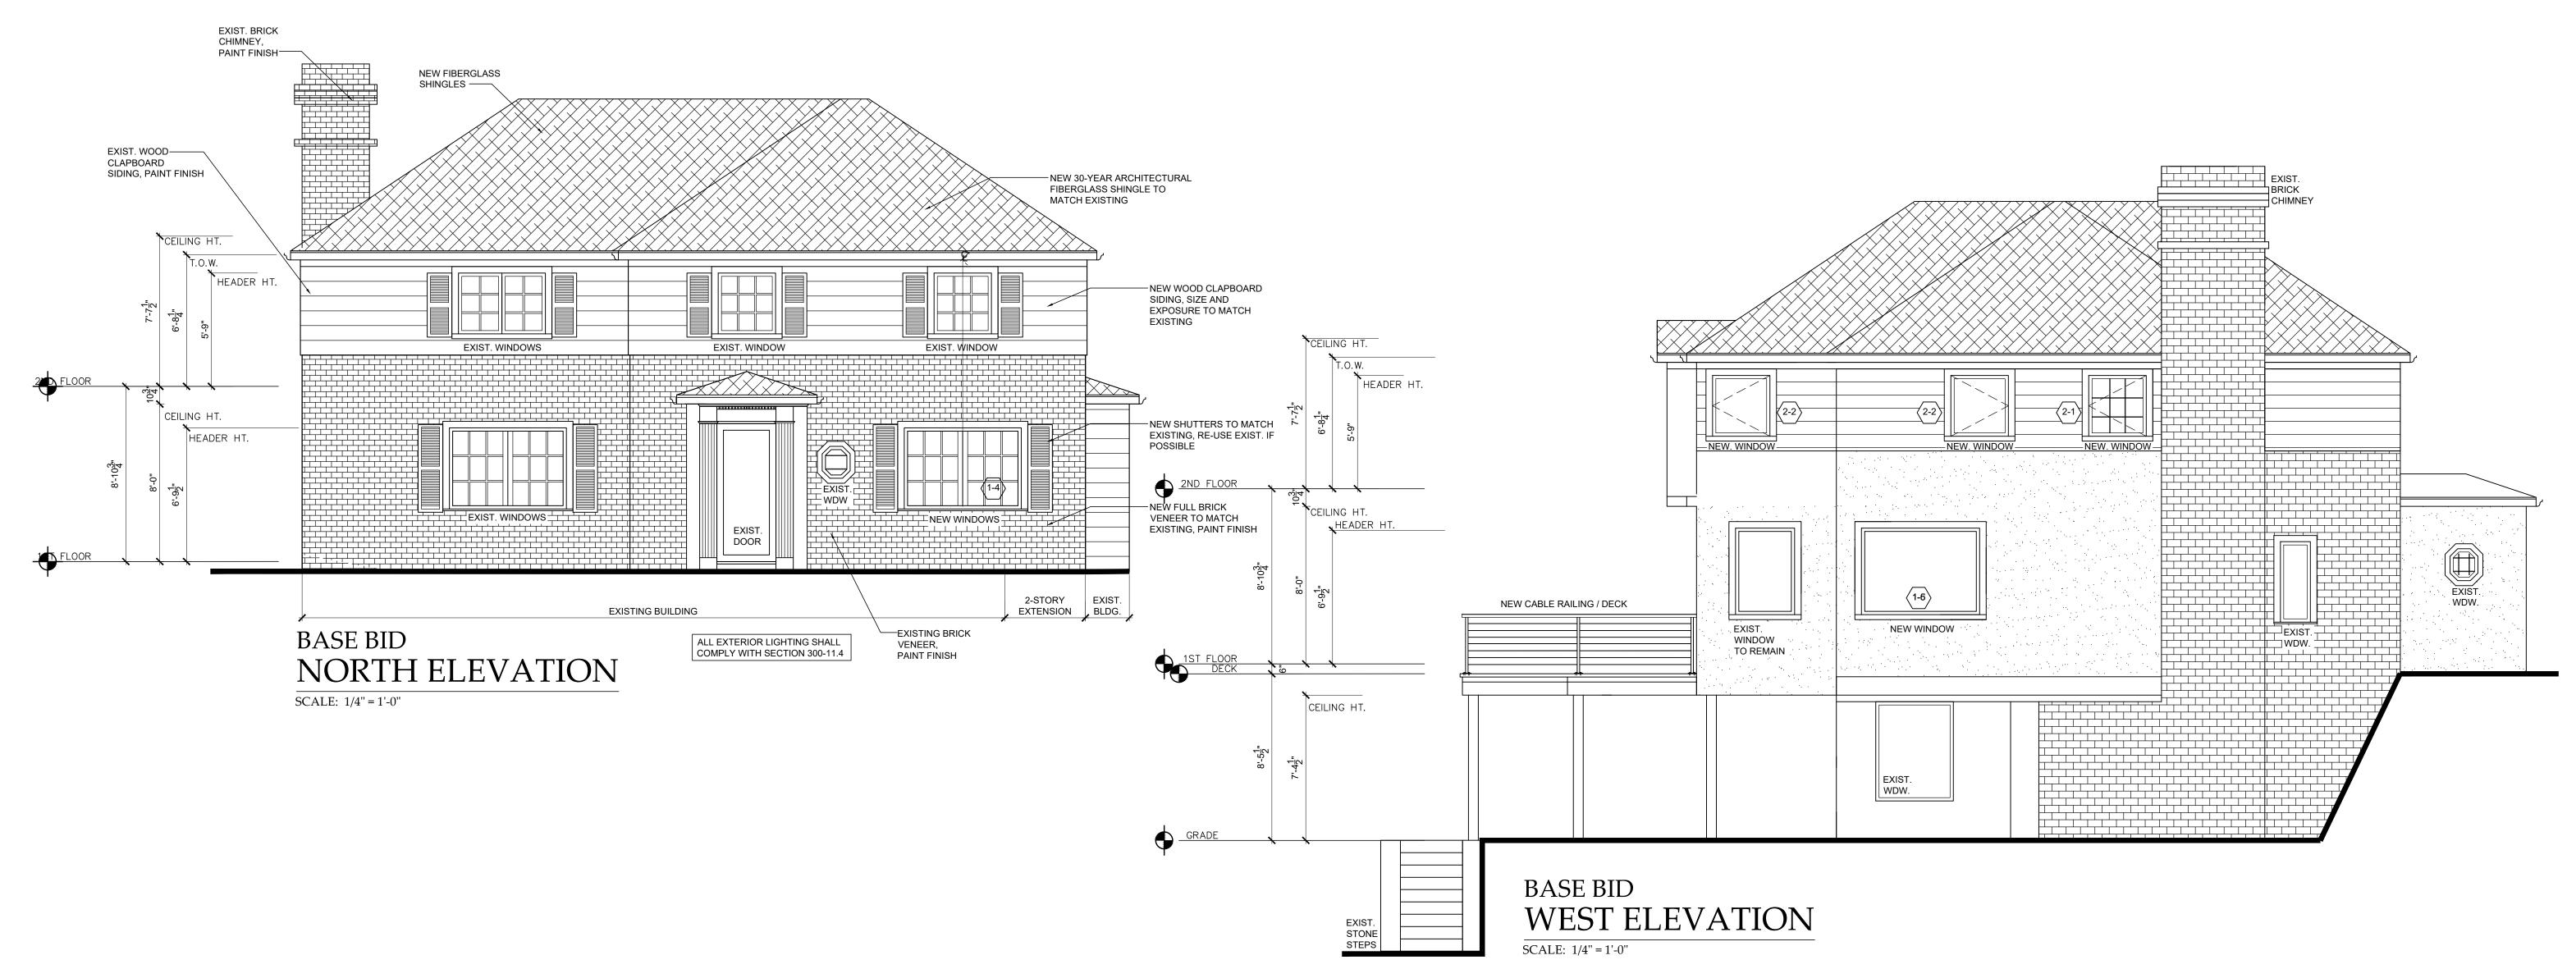












SCALE: NTS



SOUTH ELEVATION SCALE: 1/4" = 1'-0"

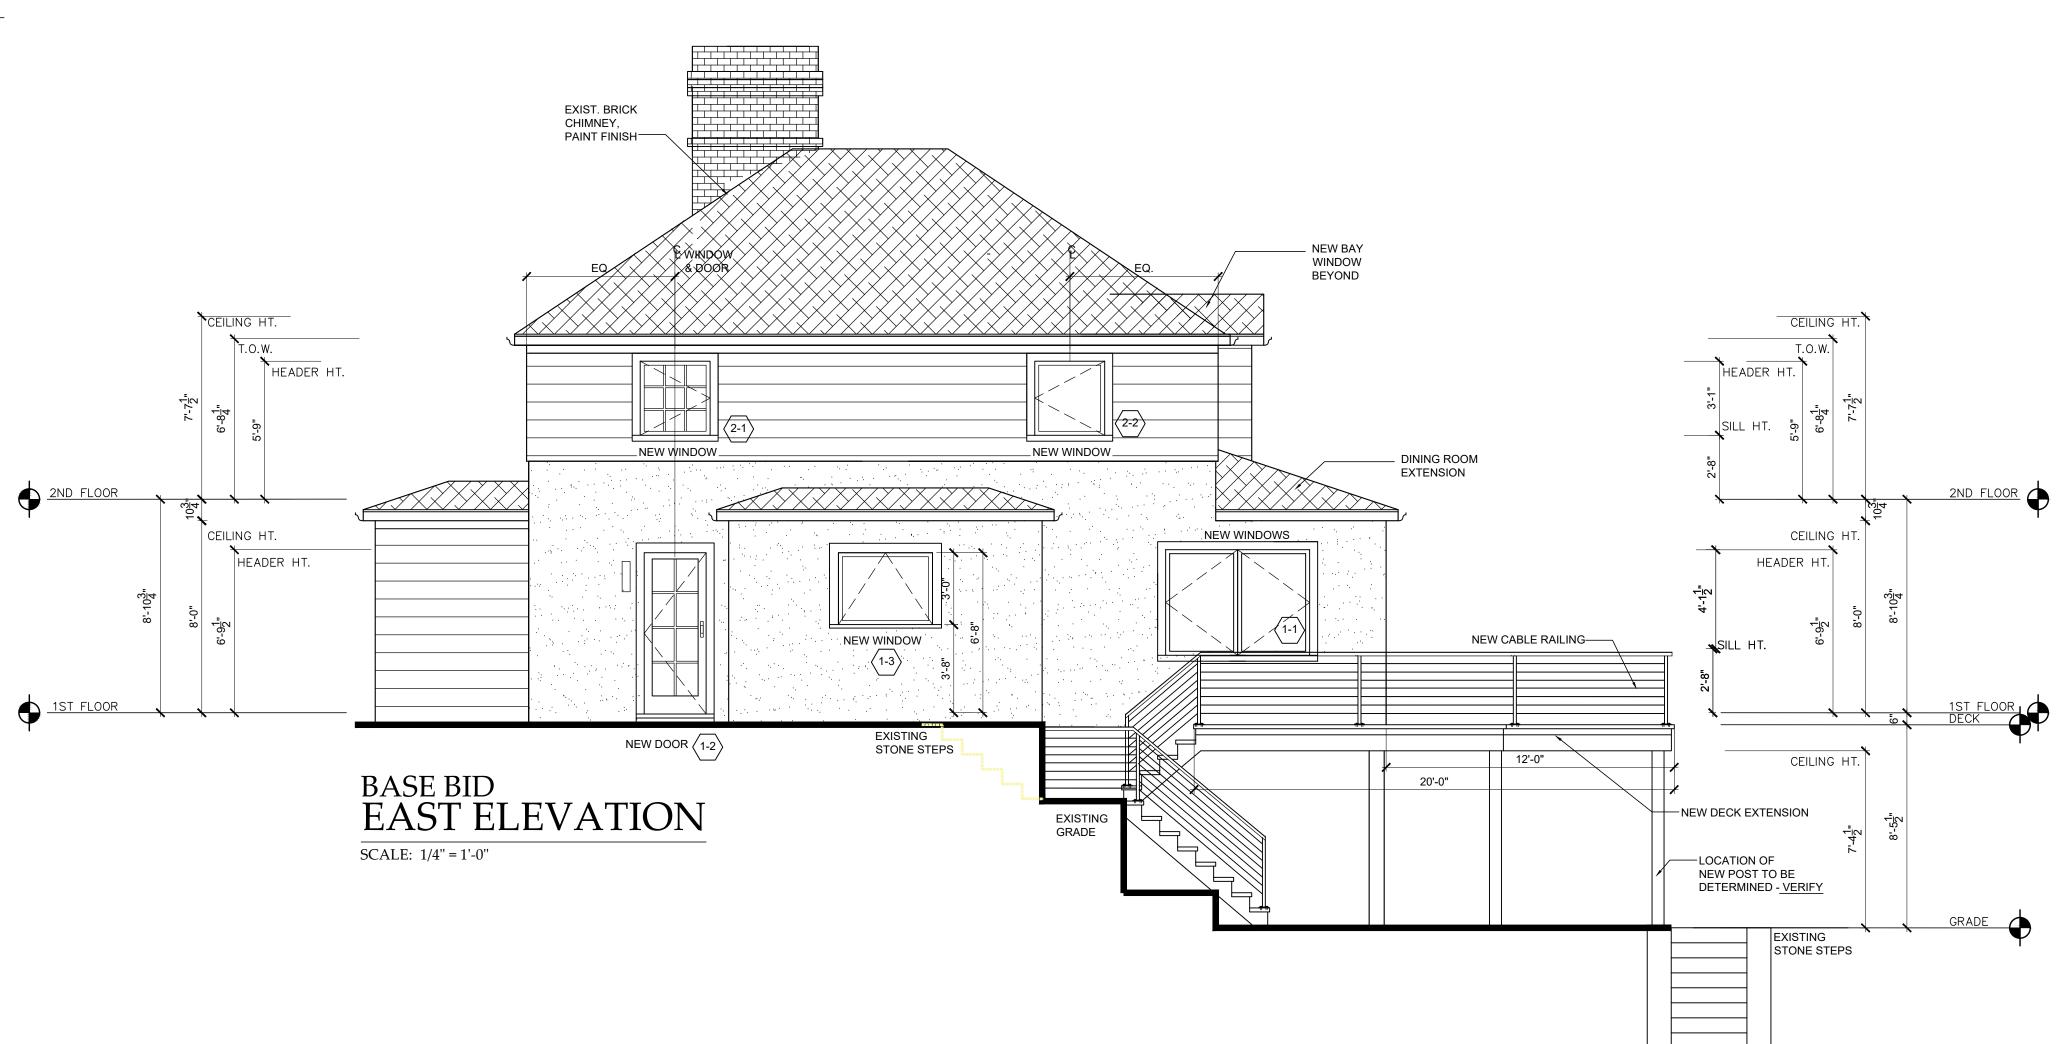

WINDOW & GLASS DOOR SCHEDULE


No	Description	Manufacturer/ Model #	Rough Opening	Notes	Qty.
FIRS	T FLOOR				<u>'</u>
1-1	Casement	Andersen 400 Series #CXW24	5'-11 5/8" X 4'-0"	Colonial Muntin pattern to match existing	1
1-2	Frenchwood Patio Door	Andersen 400 Series #FWH2768	2'-6" x 6'-8"	Colonial Muntin pattern	1
1-3	Awning	Andersen 400 Series #C235	4'-0" X 3'-4 13/16"	No muntins	1
1-4	Casement	Andersen 400 Series #CXW24	5'-11 5/8" X 4'-0"	No muntins	1
1-5	Frenchwood Sliding Doors	Andersen 400 Series # FWG12068	11'-9" x 6'-8"	No muntins	1
1-6	Picture	Andersen 400	5'-11 5/8" X 4'-4"	No muntins	1

No	Description	Manufacturer/ Model #	Rough Opening	Notes	Qty.
FIRS	T FLOOR		<u>'</u>		_
2-1	Casement	Andersen 400 Series #CX13	2'-7 ½" X 2'-11 15/16"	Colonial Muntin pattern to match existing	2
2-2	Casement	Andersen 400 Series #CX13	2'-7 ½" X 2'-11 15/16"	No muntins	4
2-3	Casement & Picture	Andersen 400 Series #C13 #CXW13, #C13	2'-0 1/8" X 2'-11 + 2'-11 15/16" X 2'-11 + 2'-0 1/8" X 2'-11	Tempered, triple mulled unit	1
2-4	Casement & Picture	Andersen 400 Series #C14,#CXW14, #C14	2'-0 1/8" X 4'-0" + 2'-11 15/16" X 4'-0" + 2'-0 1/8" X 4'-0"	Tempered, triple mulled unit at bay window	1

WINDOW & GLASS DOOR NOTES:

- 1. All new windows & glass doors will have the following features:
 Exterior color: TBD
- Interior: Primed
- Glass: Double insulated low-e Hardware: TBD
- Hardware Finish: TBD
- Window Screens: TBD
- Door Screens: TBD
- U-value = 0.28
- All safety glass to be laser etched

2. Owner & Architect to review and approve window order prepared by window manufacturer before ordering.

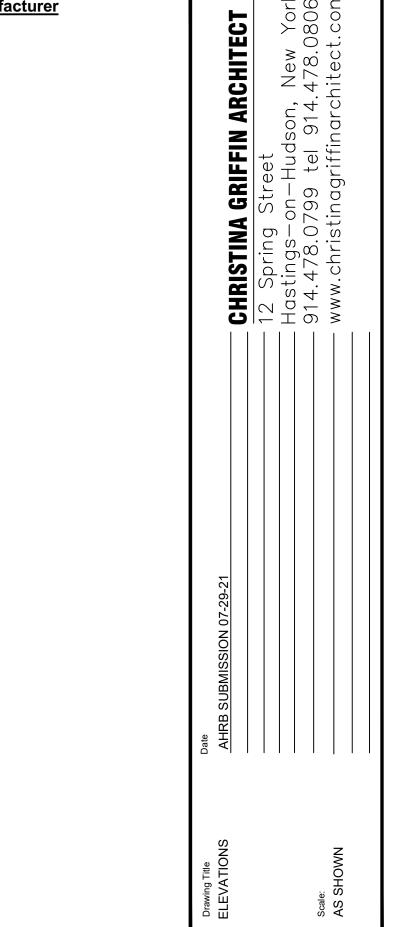



GE RENOV

107(fax






42 APPLETON PLACE

EXISTING STREETSCAPE

SCALE: 3/16" = 1'-0"

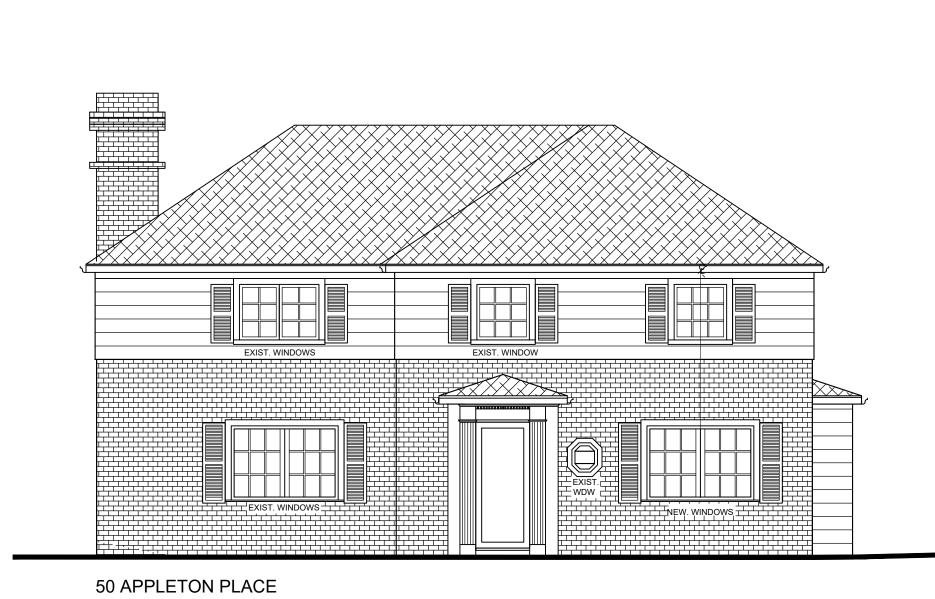



42 APPLETON PLACE

PROPOSED STREETSCAPE SCALE: 3/16" = 1'-0"



A-5

RENOVATIONS TO THE
POLLACK- REISINGER RESIDENCE
50 APPLETON PLACE DOBBS FERRY, NY 10522

on, New York 114.478.0806 architect.com

ARCHITECT