


REVISIONS		
REV. No.	DATE	DESCRIPTION
00	02/03/14	RELEASED

TOP SECTION OPTION: REC11

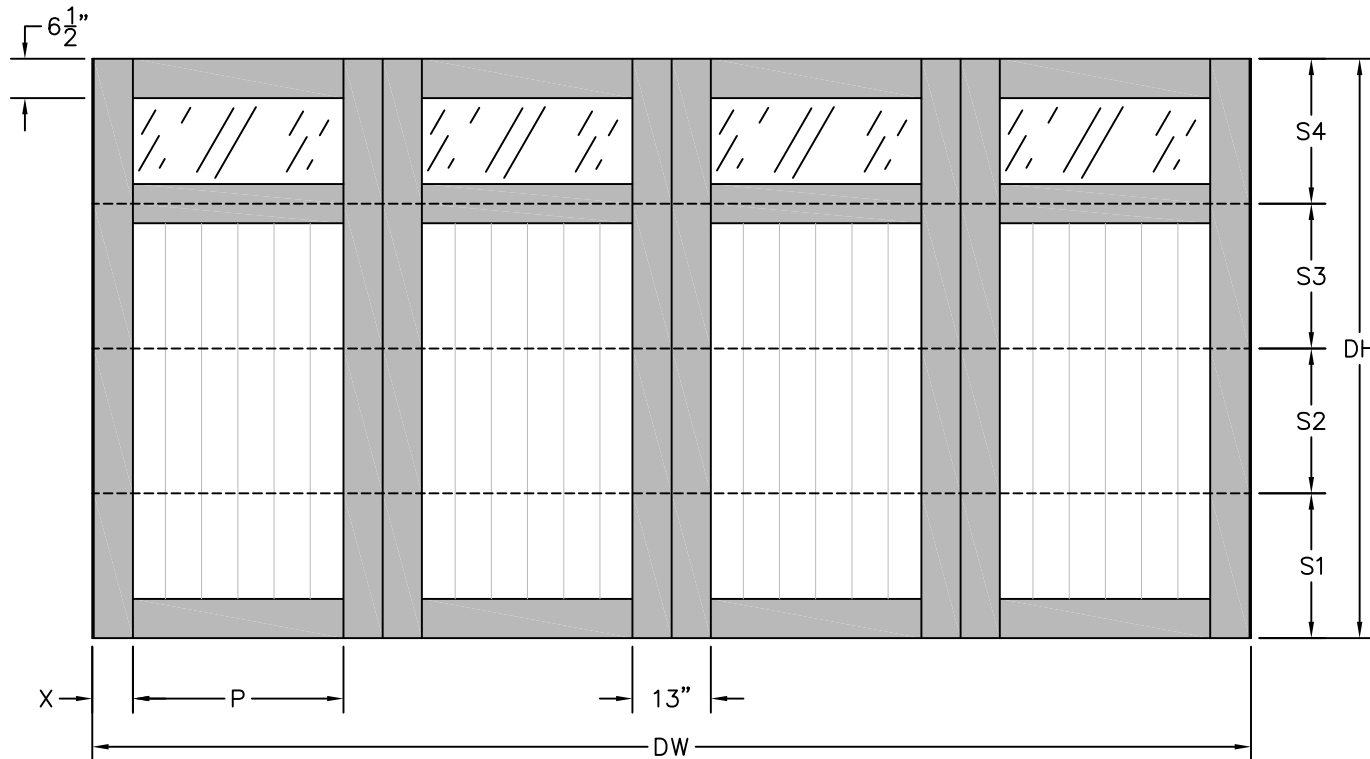

DW	X	P
15'-0"	6.6875"	31.875"
15'-2"	7.6875"	31.875"
15'-6"	6.6875"	33.375"
15'-8"	7.6875"	33.375"
16'-0"	6.6875"	34.875"
16'-2"	7.6875"	34.875"
18'-0"	6.6875"	40.875"
18'-2"	7.6875"	40.875"
20'-0"	6.6875"	46.875"
20'-2"	7.6875"	46.875"

DH	S1	S2	S3	S4
6'-6"	18"	18"	18"	24"
6'-9"	18"	21"	18"	24"
7'-0"	18"	24"	18"	24"
7'-3"	21"	21"	21"	24"
7'-6"	24"	18"	24"	24"
7'-9"	24"	21"	24"	24"
8'-0"	24"	24"	24"	24"

**NOTES:**

- 1.) CUSTOMER TO SELECT TRACK AND COUNTERBALANCE OPTIONS WHEN PLACING ORDER.
- 2.) STANDARD DOOR CONFIGURATION INCLUDES ONE SLIDE LOCK. OTHER LOCK OPTIONS ARE AVAILABLE.

**Clopay®**  
Building Products Company

FRONT ELEVATION  
VIEW DRAWING

**IMPORTANTE:** This document must be signed and returned prior to any fabrication. Please reference this drawing number on all correspondence. Thank you!

**NOTICE:** Confidential/Proprietary information of CLOPAY BUILDING PRODUCTS CO. is contained herein and may not be disclosed, used, duplicated, made available, or distributed without its prior consent. Failure to observe this notice may result in liability for any damages and losses resulting therefrom.

DRAWN BY: SQB

DATE: 02/03/14

APPROVAL SIGNATURE:

APPROVAL DATE:

CUSTOMER: CANYON RIDGE SERIES

JOB: FRONT ELEVATION

CSR/DC: TROY, OHIO

DRAWING NUMBER:  
CR-4P-4S-11-CL-REC11

REV. 00

SHEET: 1 of 1


*Canyon Ridge® Carriage House 5-Layer  
Design 13; Shown in Dark Finish with Mahogany  
Cladding, Mahogany Overlays and REC13 Window  
Design (Model CAN213MMREC13)*





## GRILLE OPTIONS

Grille patterns are available in widths and configurations to fit any architectural style or the taste of any customer. We can match virtually any existing grille pattern, and we'll even work with you and your customers to create custom patterns.




Permanent exterior  
Permanent interior  
with spacer

### FULL DIVIDED LIGHT

Permanently applied to the interior and exterior of the window, with a spacer between the glass.




Permanent exterior  
Permanent interior



Permanent exterior  
Removable interior

### SIMULATED DIVIDED LIGHT

Permanent grilles on the exterior and interior, with no spacer between the glass. We also offer permanent exterior grilles with removable interior grilles.



Removable interior



Finelight  
grilles-  
between-  
the-glass\*

### CONVENIENT CLEANING OPTIONS

Removable interior grilles come off for easy cleaning. Finelight™ grilles-between-the-glass are installed between the glass panes, and feature a contoured profile in 1" (25) and 3/4" (19) widths.

### Grille Bar Widths & Patterns



3/4" (19)



7/8" (22)



1 1/8" (29)



2 1/4" (57)

Actual width shown.



Our 2 1/4" (57) width grille can be positioned horizontally across the center of a casement window to simulate the look of a double-hung window.

To see all of the standard patterns available for a specific window or door, refer to the detailed product sections in this product guide.



\*7/8" (22), 1 1/8" (29) and 2 1/4" (57) are not available in Finelight grilles-between-the-glass. Dimensions in parentheses are in millimeters.

Entry Door Details

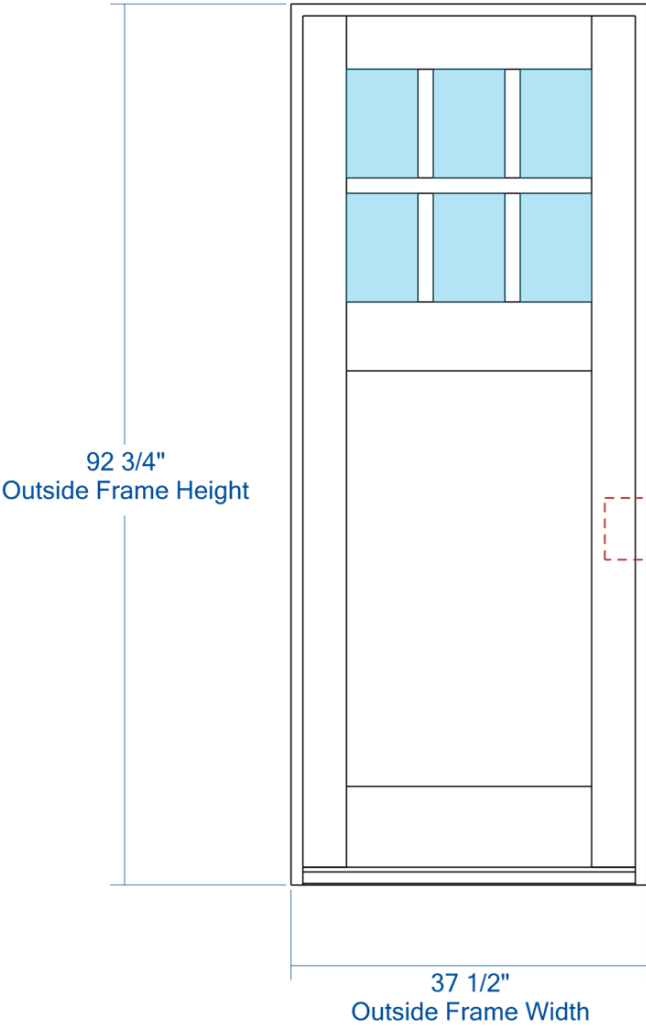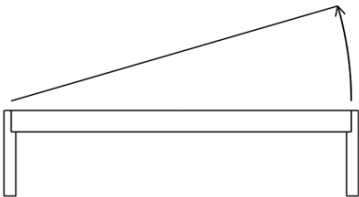

Door Style	Sticking	Panel	Material	Glass / Insert	Product Type
PL136	SS	C	Resilient Engineered Wood	3/4" Insulated Unit	Entry System



# LED RECESSED ROUND WAFER SELECTABLE CCT

Goodlite

G-20219 2"



G-20220 3"



G-20221 4"



G-20222 5"



G-20223 6"



G-20224 8"



SOFT WHITE 2700K  
WARM WHITE 3000K  
NEUTRAL WHITE 3500K

COOL WHITE 4100K  
SUPER WHITE 5000K



Pack:18

ITEM	G-20219	G-20220	G-20221	G-20222	G-20223	G-20224
DESCRIPTION	S2/5W/R/LED/5CCT	S3/8W/R/LED/5CCT	S4/12W/R/LED/5CCT	S5/15W/R/LED/5CCT	S6/18W/R/LED/5CCT	S8/24W/R/LED/5CCT
COLOR TEMP	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k	27, 30, 35, 41, 50k
OUTPUT LUMEN	300	500	925	1050	1400	2200
BEAM ANGLE	100	100	100	100	100	100
INPUT VOLTS	120V	120V	120V	120V	120V	120V
WATTAGE	5W	8W	12W	15W	18W	24W
EQUIV WATTAGE	40W	50W	75W	100W	150W	225W
CRI	>90	>80	>90	>90	>90	>90
CUTOUT	2.08"	2.94	4.25	5.25	6.20	8.25
OD	2.38"	3.60	4.75	5.75	7.20	8.75
HEIGHT	2.00	2.00	2.00	2.00	2.00	2.00
mA	110mA	180mA	270mA	300mA	390mA	580mA
OUTPUT VOLTS	33-38V	24v	38v	38v	38v	38v

## Accessories

### Emergency LED Driver




15W G-48410 30W G-48411

### 120-277V Driver



G-20219 use G-48306 Dim 0-10  
G-20220 use G-20125 Non dim  
G-20221 use G-48301 Dim 0-10  
G-20222 use G-20126 non dim  
G-20223 use G-48303 Dim 0-10  
G-20224 use G-48327 Dim 0-10

### New Construction Plate



ITEM G-19969  
Use for  
G-20220  
G-20221 (1 Punch Out)  
G-20223 (2 Punch Outs)



ITEM G-19981  
Use for  
G-20219  
G-20222 (3 Punch Outs)

### Extension Cords



3 pin  
G-20219-G-20221 - G-20223  
2 pin  
G-20220 - G-20222  
Use  
G-20247 5ft - G-20248 10ft  
Use  
G-20210 6ft - G-20211 10ft  
Twist Lock  
G-20224 - G-48328 10 ft



Dimmable:  
5%



Lifetime:  
50,000 hours



Warranty:  
3 years



# BOWMAN 6 WALL SCONCE



The classic silhouette of this sleek LED wall sconce makes it suitable for both indoor and outdoor applications. The Bowman's die-cast aluminum body houses a powerful, long-lasting LED light source tightly controlled for down light only, yet supplying significant illumination for even the darkest nights. Available in two sizes and five finishes.

## Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## SPECIFICATIONS

DELIVERED LUMENS	1163
WATTS	47.2
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight
CCT	2700K**, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTINGS	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	3.2 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

\*\* Available in Black and Bronze finish only.



BOWMAN 6  
Shown in Black



BOWMAN 6  
Shown in Bronze



BOWMAN 6  
Shown in Charcoal



BOWMAN 6  
Shown in Silver



BOWMAN 6  
Shown in White

## ORDERING INFORMATION


PRODUCT	LENGTH	FINISH	LAMP
700WSBOW	6 6"	B BLACK	-LED827 LED 90 CRI, 2700K 120V*
		Z BRONZE	-LED827-277 LED 90 CRI, 2700K 277V*
		H CHARCOAL	-LED830 LED 90 CRI, 3000K 120V
		I SILVER	-LED830-277 LED 90 CRI, 3000K 277V
		W WHITE	

\*AVAILABLE IN BLACK AND BRONZE FINISH ONLY

# ASYMMETRICAL RECESSED CHANNEL WAC LIGHTING

LED-T

Responsible Lighting®

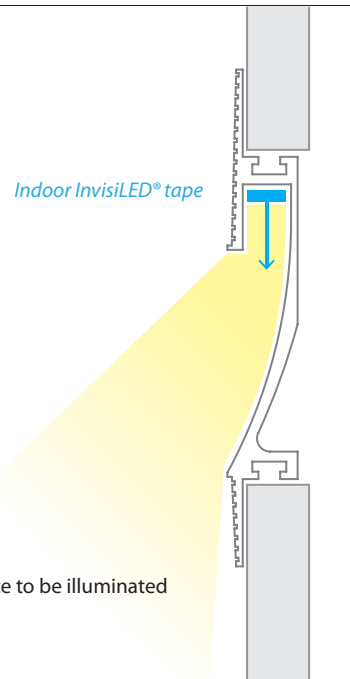



Fixture Type:

Catalog Number:

Project:

Location:

- Installs within drywall depth
- Linear channel can be field cut
- Accommodates one run of InvisiLED® indoor tape
- Dense foam insert for spackling
- Recommended installation within 15 inches of surface to be illuminated
- Aluminum extrusion powder coated in matte white

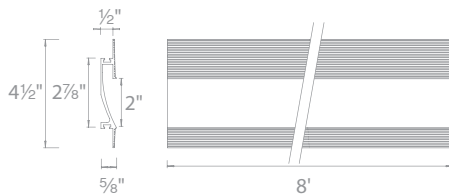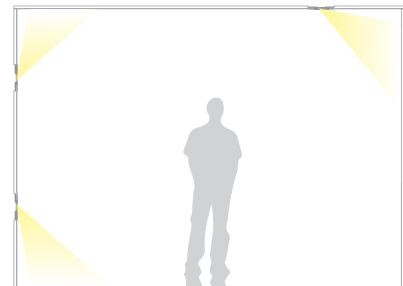

8 ft linear channel

Includes an end cap  
Can be field cut


**LED-T-RCH2-WT**



Power feed

Includes a wiring box, two hanger bars,  
a five-pin InvisiLED® adapter, and two end caps  
The end cap may be placed on either side or be removed  
Hanger bars may install on any side of the wiring box

**LED-T-RBOX2-WT**

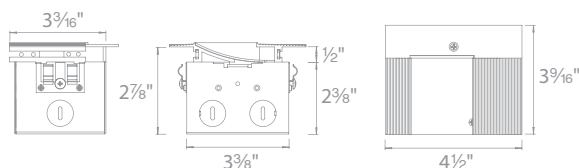

**LED-T-\_\_\_\_-WT**

Example: **LED-T-RCH2-WT**

WAC Lighting  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center  
1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585