



Acer x freemanii 'Autumn Blaze' Ilex opaca Liquidambar styraciflua Itea virginica 'Henry's Garnet' Amelanchier canadensis



Magnolia stellata Thuja plicata 'Green Giant'



Quercus rubra Ilex verticillata



Cornus sericea Physocarpus opulifolius 'Diabolo'




Viburnum dentatum Viburnum rhytidophyllum



Vinca minor Thuja occidentalis 'Emerald Green'



Buxus 'Green Mountain' Buxus 'Winter Gem'

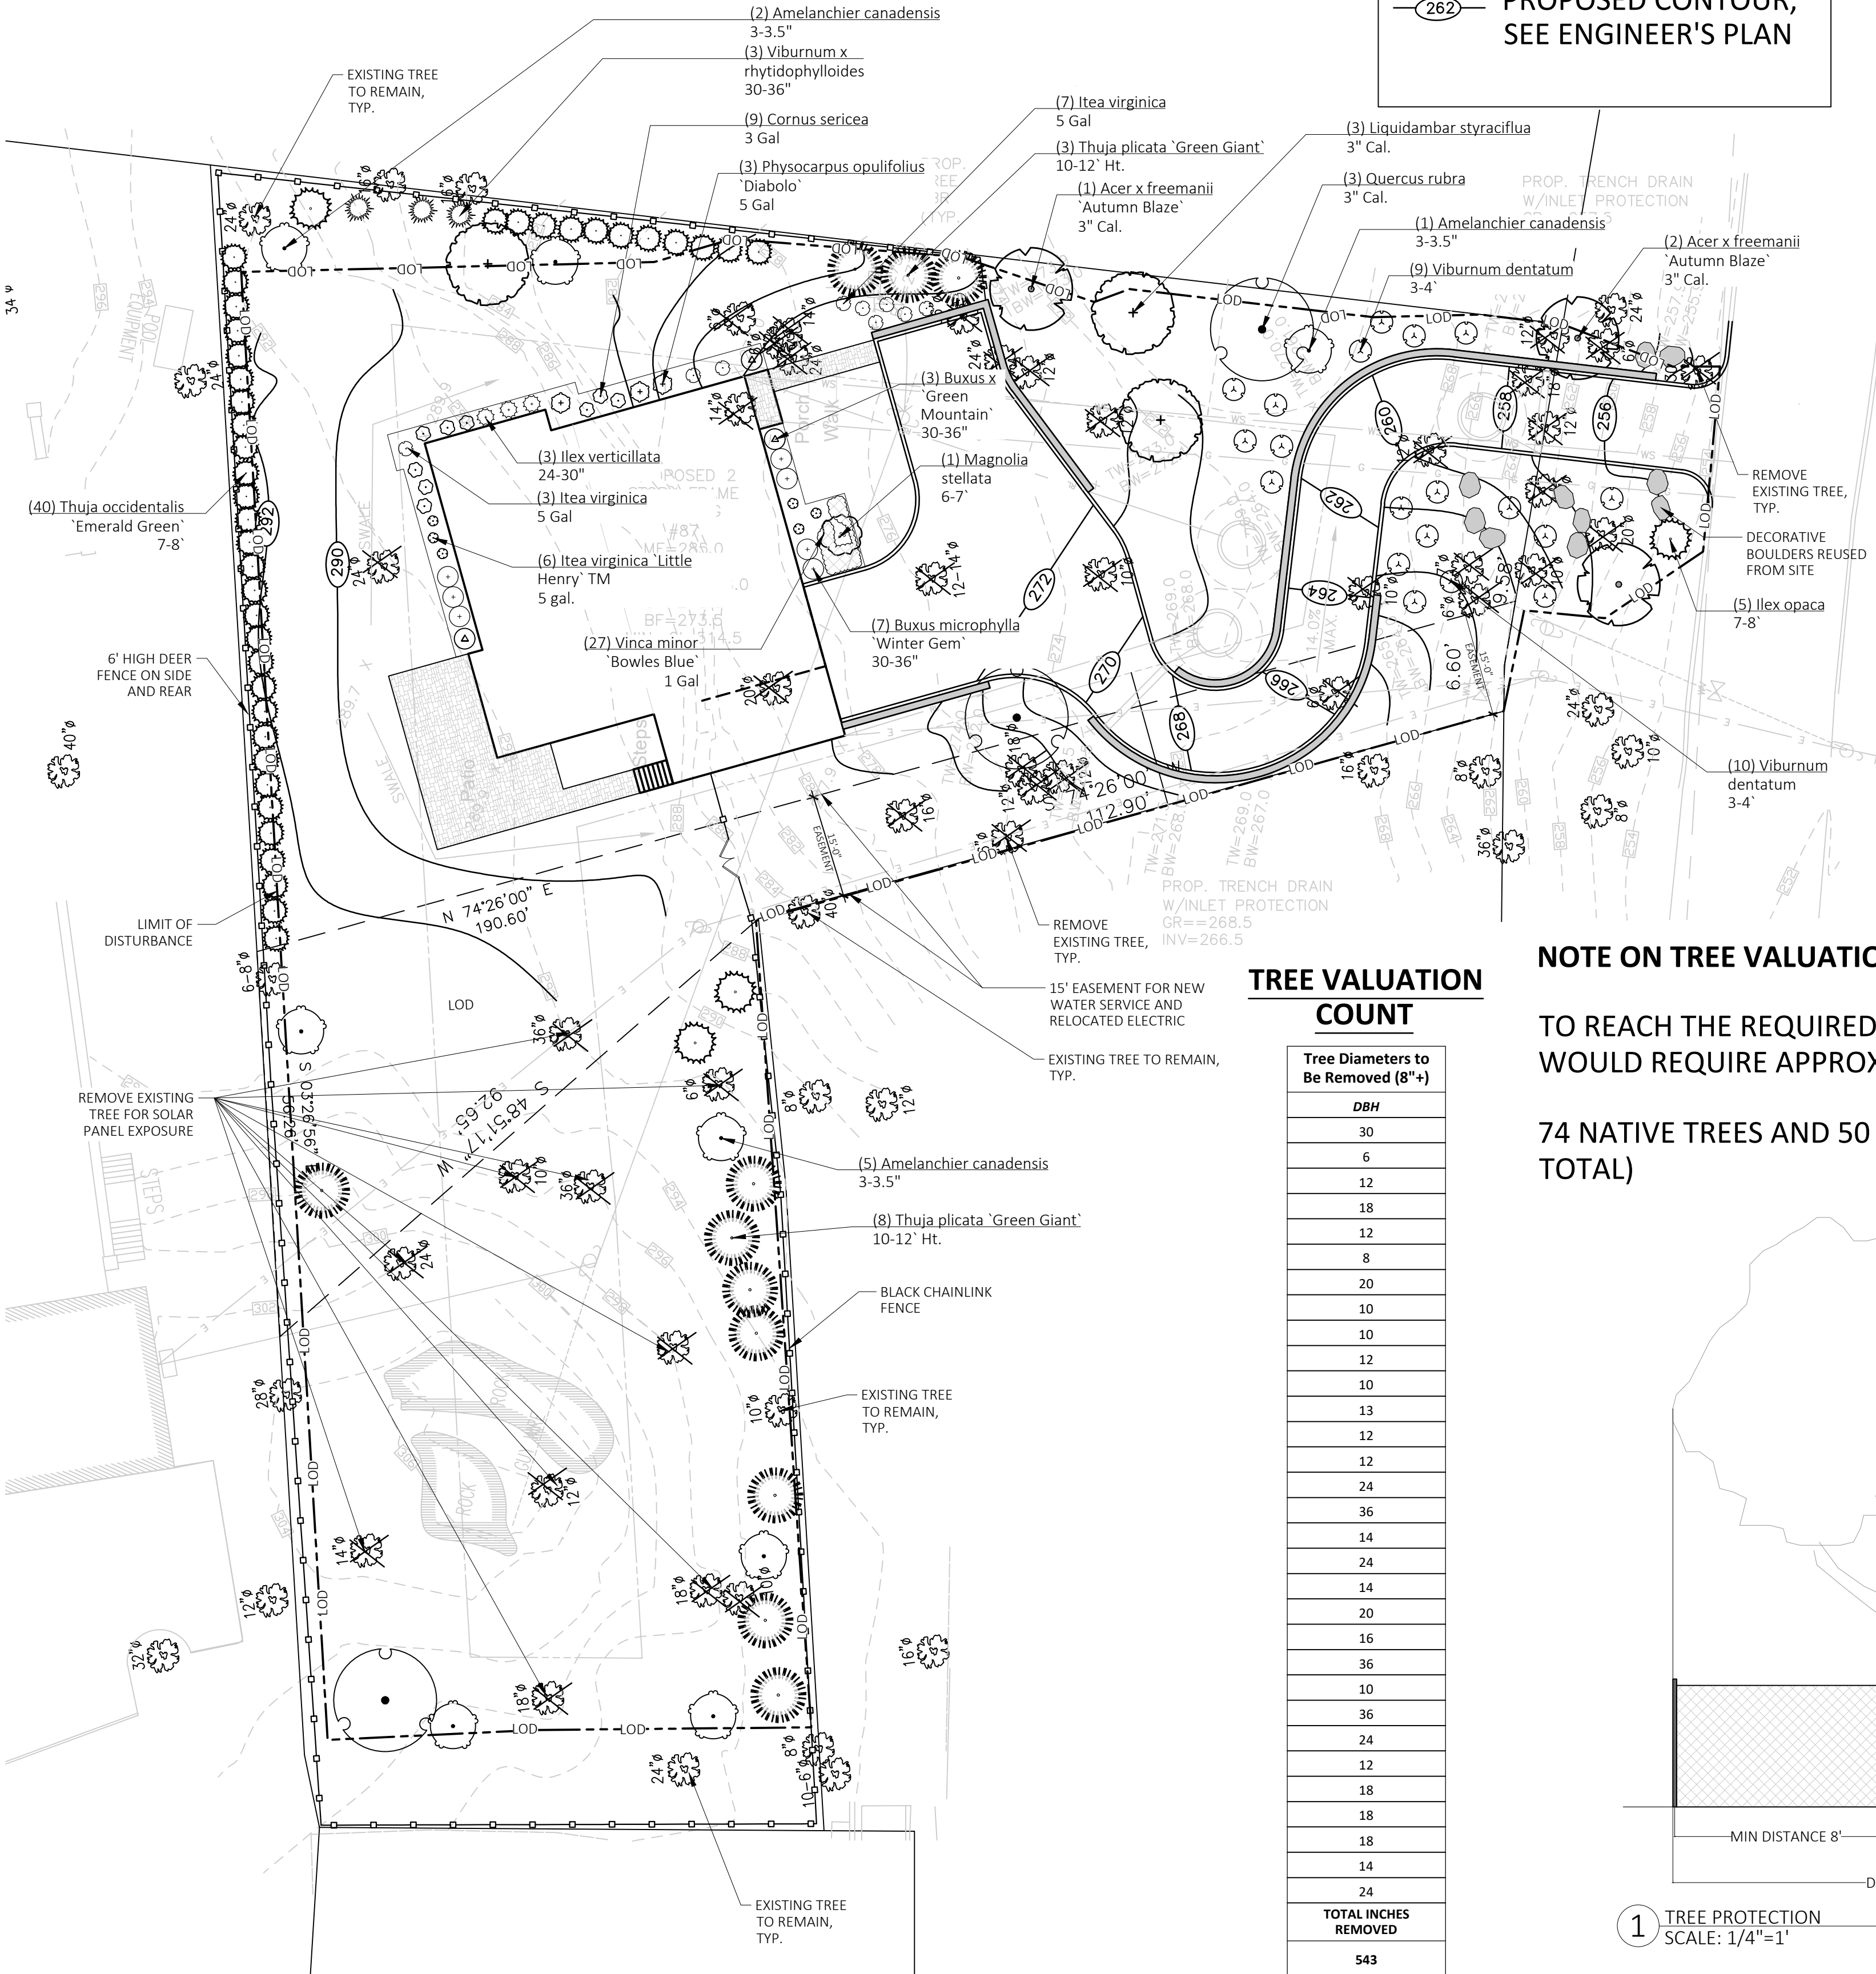

LEGEND

TREE TO REMAIN

REMOVE TREE

LIMIT OF DISTURBANCE

PROPOSED CONTOUR, SEE ENGINEER'S PLAN

PLANT SCHEDULE

TREES	QTY	BOTANICAL NAME	COMMON NAME	SIZE	CONTAINER
	3	Acer x freemanii 'Autumn Blaze'	Autumn Blaze® Freeman Maple	3" Cal.	
	8	Amelanchier canadensis	Serviceberry Single Stem	3-3.5"	Single Stem
	5	Ilex opaca	American Holly	7-8"	
	3	Liquidambar styraciflua	Sweet Gum	3" Cal.	
	1	Magnolia stellata	Star Magnolia Multi-Trunk	6-7'	
	3	Quercus rubra	Red Oak	3" Cal.	
	40	Thuja occidentalis 'Emerald Green'	Emerald Green Arborvitae	7-8"	
	11	Thuja plicata 'Green Giant'	Western Red Cedar	10-12' Ht.	
SHRUBS	QTY	BOTANICAL NAME	COMMON NAME	SIZE	CONTAINER
	7	Buxus microphylla 'Winter Gem'	Globe Winter Gem Boxwood	30-36"	
	3	Buxus x 'Green Mountain'	Green Mountain Boxwood	30-36"	
	9	Cornus sericea	Red Twig Dogwood	3 Gal	
	3	Ilex verticillata	Winterberry	24-30"	
	10	Itea virginica	Virginia Sweetspire	5 Gal	
	6	Itea virginica 'Little Henry' TM	Virginia Sweetspire	5 gal.	
	3	Physocarpus opulifolius 'Diabolo'	Diablo Ninebark	5 Gal	
	19	Viburnum dentatum	Viburnum	3-4'	
	3	Viburnum x rhytidophyloides	Lantanaphyllum Viburnum	30-36"	
GROUND COVERS	QTY	BOTANICAL NAME	COMMON NAME	SIZE	CONTAINER
	27	Vinca minor 'Bowles Blue'	Dwarf Periwinkle	1 Gal	


TREE VALUATION COUNT

Tree Diameters to Be Removed (8"+)
DBH
30
6
12
18
12
8
20
10
10
12
12
12
24
36
14
24
14
20
16
36
10
36
24
12
18
18
18
14
24
TOTAL INCHES REMOVED
543


NOTE ON TREE VALUATION:

TO REACH THE REQUIRED 50% DBH OF THE TOTAL AGGREGATE OF TREES TO BE REMOVED WOULD REQUIRE APPROXIMATELY 90 (3" DBH) NEW TREES TO BE PLANTED ON SITE.

74 NATIVE TREES AND 50 NATIVE SHRUBS ARE PROPOSED ON THIS PLAN. (63 SHRUBS IN TOTAL)

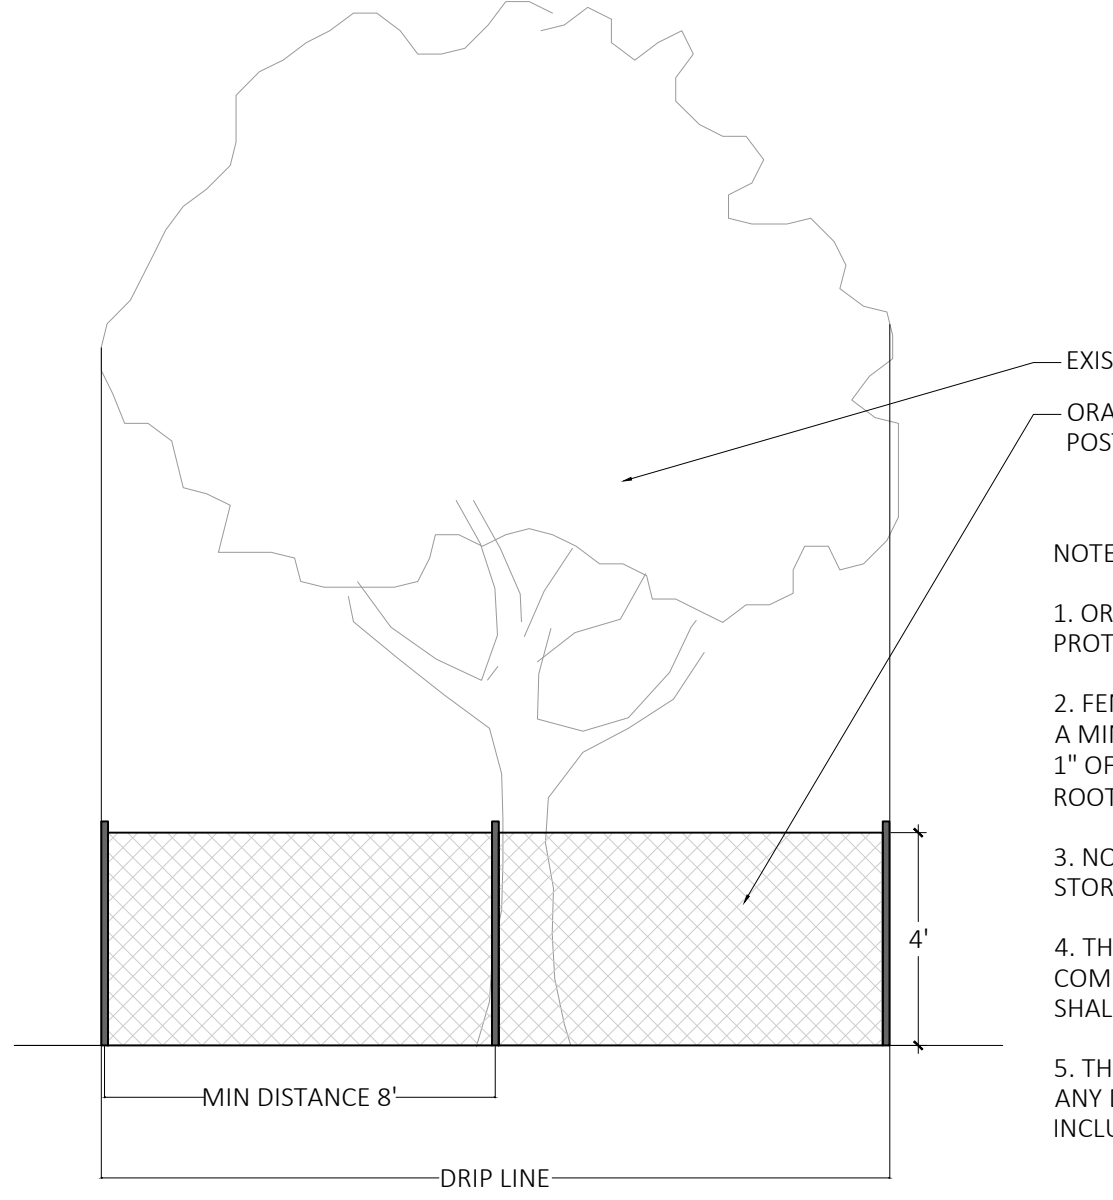

- EXISTING TREE TO BE PROTECTED
- ORANGE PLASTIC BARRIER FENCE WITH STEEL POSTS INSTALLED AT 8' O.C.
- NOTES:
- ORANGE BARRIER FENCING SHALL BE USED TO PROTECT ALL EXISTING TREES AND ROOT ZONES.
 - FENCING SHALL CREATE A ZONE OF PROTECTION WITH A MINIMUM RADIUS OF 1' FROM TREE TRUNK FOR EVERY 1" OF OF-TRUNK DIAMETER (I.E. 12" DBH TREE=12' RADIUS ROOT ZONE PROTECTION)
 - NO CONSTRUCTION MATERIALS OR DEBRIS SHALL BE STORED INSIDE OF THE FENCING.
 - THE FENCING SHALL BE INSTALLED PRIOR TO THE COMMENCEMENT OF CONSTRUCTION ACTIVITIES, AND SHALL BE REMOVED WHEN CONSTRUCTION IS COMPLETE.
 - THE OWNER SHALL BE INFORMED IMMEDIATELY OF ANY DAMAGE TO EXISTING TREES TO BE PRESERVED, INCLUDING BARK AND BRANCH DAMAGE.

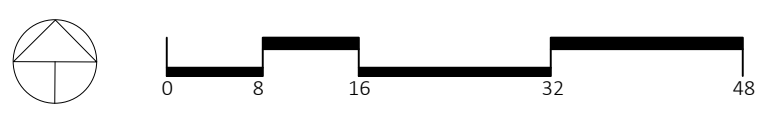

TO SCALE WHEN PLOTTED ON 24x36
PROGRESS SET NOT FOR CONSTRUCTION

YOST
DESIGN
LANDSCAPE
ARCHITECTURE

178 elizabeth st
pearl river, ny 10965
p 845.365.4595 | f 914.361.4473
yostdesign.com

ANAND RESIDENCE

87 LEFURGY AVENUE
DOBBS FERRY, NY

DATE: APRIL 24, 2023
DRAWN BY: EER
JOB NO: 230418
SCALE: 1/16" = 1'-0"
FILENAME: 2023_0706 87 Lefurgy

REVISIONS:
MAY 31, 2023
JULY 5, 2023



LANDSCAPE
PLAN

SHEET NO.

L-101

SHEET: 1 of 1