


Plant Schedule


Symbol	Scientific Name	Common Name	Height	Spread	Container	Quantity
G-AR	Geranium 'Azure Rush'	Azure Rush Geranium			#1	3
Hs-M	Hibiscus syriacus 'Minerva'	Minerva Rose of Sharon	36-42"	30-36"	B&B	3
Hp-L	Hydrangea paniculta 'Limelight'	Limelight Hydrangea	30-36"	30-36"	#5	3
Hp-L	Hydrangea paniculta 'Little Lime'	Little Lime Hydrangea	24-30"	24-30"	#5	8
Hq-SQ	Hydrangea quercifolea 'Snow Queen'	Snow Queen Hydrangea	30-36"	30-36"	#5	5
Ic-C	Ilex crenata 'Compacta'	Japanese Holly	18-24"	18-24"	#5	6
Iv-SG	Ilex meserveae 'Blue Princess'	Blue princess Holly	30-36"	30-36"	#7	2
R-RE	Rhododendron Roseum Elegans	Roseum Elegans Rhododendron	36-42"	36-42"	#7	6
R-PD	Rosa 'Popcorn Drift'	Popcorn Drift Rose	12-14"	12-18"	#3	12
Vr-A	Viburnum rhytidophyllum 'Alleghany'	Alleghany Viburnum	24-30"	24-30"	#5	3

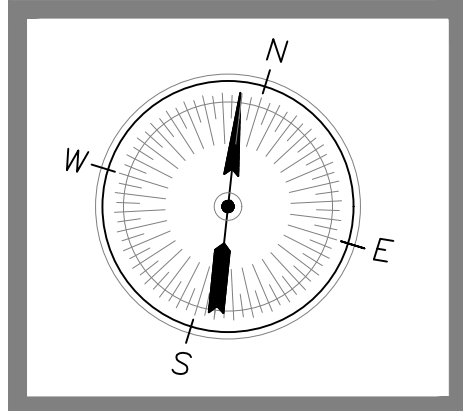

REVISIONS

DRAWING: Planting - Lighting Plan
DRAWN BY: Robert D. Schweitzer
SCALE: 1"=8'
SUBMITTAL: Town Approval
DATE: 12/15/22

PREMISES 197 Clinton Avenue Dobbs Ferry, NY
PROPERTY OWNER Bufalini Residence 197 Clinton Avenue Dobbs Ferry, NY
XXX
XXX

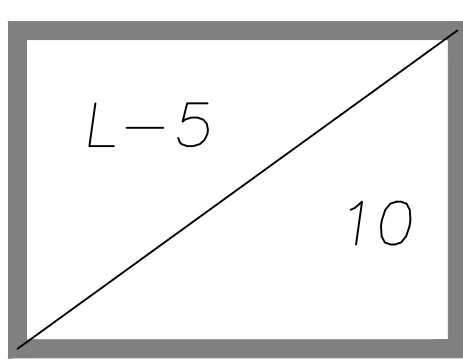

GENERAL NOTES

Planting

- All planting will be done according to Standard Nurseryman Practices.
- Plantings will be guaranteed to be in satisfactory health for one year after completion date. Any plantings that are dead or in poor health shall be replaced by the Contractor, free of charge to the Owner.
- Planting beds shall be amended with 25% composted leaf litter. This shall be tilled into the beds to a depth equal to the root ball / container and three times the diameter. "Dry Roots" shall be added at the manufactures suggested rate, distributed uniformly throughout the planting bed.
- Planting Beds and Tree Pits will be mulched with 1-1/2" of shredded Cedar Bark.
- Drip Irrigation in the planting beds and spray turf irrigation shall be installed at the Owner's discretion. Should the Owner decide to install irrigation, the Landscape and Irrigation Contractors will need to coordinate their installations to avoid conflict.
- Disturbed Areas to be returned to lawn, shall be prepared as follows.
 - Upon completion of Rough Grading, Fine Grade all lawn areas to the elevations shown on the Site Plan.
 - Spread 2 inches of screened top soil uniformly over all fine graded lawn areas.
 - Apply a Sun-Shade seed mix (Supreme #14 Planter's Choice Nursery; 203-426-4037) consisting of, 30% Boreal Creeping red Fescue, 20% Integra Perennial Rye, 15% Shining Star 15% Sonata Perennial Rye, 10% Alene Kentucky Blue, 10% Survivor Chewings Fescue.
 - Lightly steel rake seed into the top soil.
 - PennMulch Seed Accelerator w/ fertilizer at the manufactures suggested rate covering all seeded areas.
- Material quantities shall be verified in the field with the landscape architect and adjusted for final count prior to the Contractor purchasing plant material needed for installation.
- All planting material shall be approved by the landscape architect or managing authority prior to installation.

Lighting

- Two Decorative Pier Lighting fixtures have been selected (see details for manufacture and product type).
- Lighting shall be installed by an Electrician, Bonded & Licensed to work in Westchester County, NY.

