


1 O"

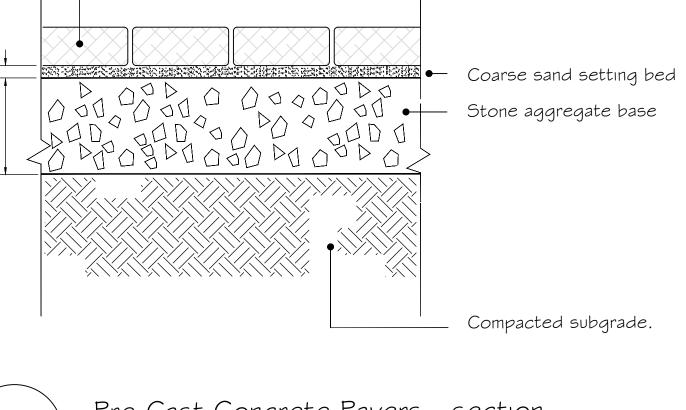



Pre-Cast Concrete Pavers - section Scale - |" - |.0'

Pre-cast conc paver to be

later specified by L.A.

Compacted subgrade.

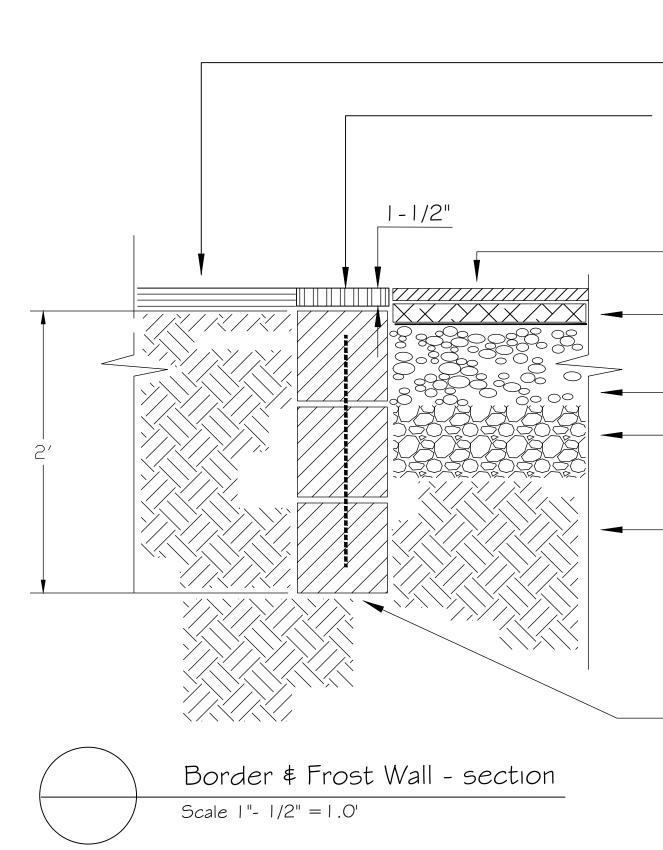

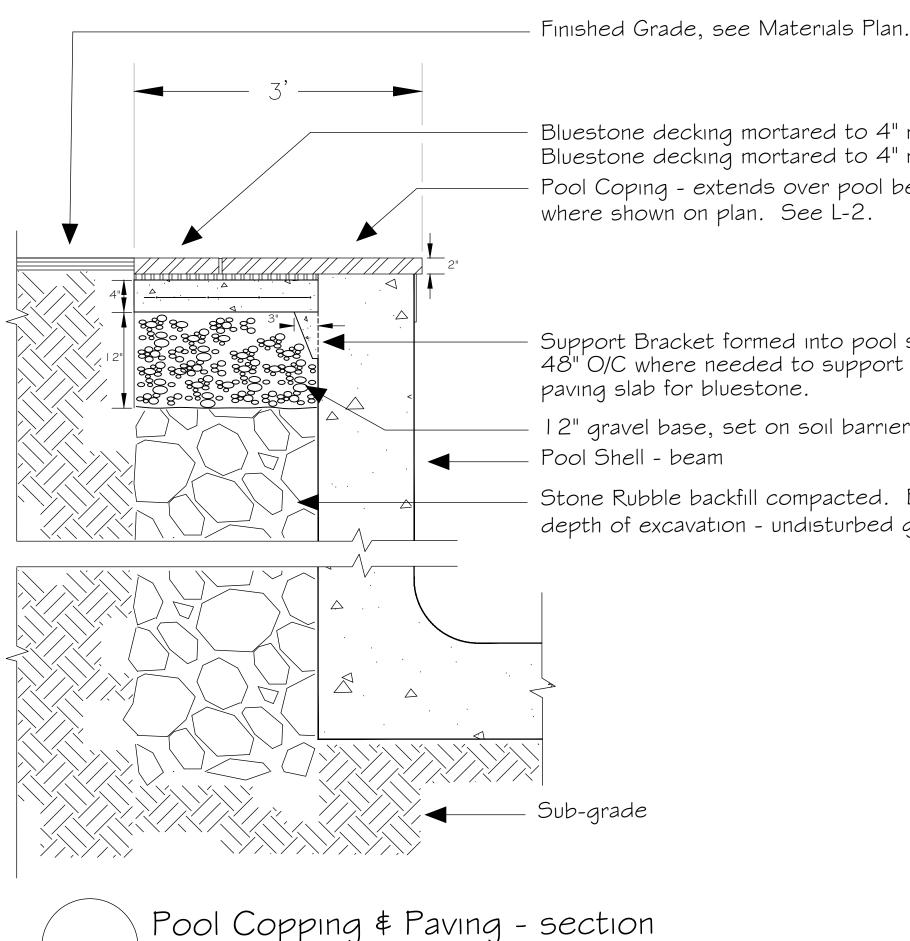

Scale |" = |.0'

Finished grade see Materials Plan

Eight inch mortared Bluestone Border. Pattern shall be as shown on Materials Plan. Provide Expansion Joints where shown on Materials Plan. Mortar Bluestone to concrete block Frost Wall.

Pre-Cast Concrete Pavers - see manufactures detail

Setting Bed as specified by Unilock Paving Install Filter Fabric membrane under Setting Bed.

6" Aggregate Base as specified by Unilock Paving

6" Crushed Stone under bed

- Undisturbed sub grade

8" inch hollow core concrete block Frost Wall. Wall to be continuous w/ Bluestone Border. Blocks to be mortar filled, reinforce (verticle) w/ #3 re-bar, IG" O/C continuous w/ Frost Wall, (horizontal) every coarse w/ steel wire set in morar.

> Bluestone decking mortared to 4" reinforced Bluestone decking mortared to 4" reinforced Pool Coping - extends over pool beam where shown on plan. See L-2.

> Support Bracket formed into pool shell. 48" O/C where needed to support concrete paving slab for bluestone.

12" gravel base, set on soil barrier fabric Pool Shell - beam

Stone Rubble backfill compacted. Extend to depth of excavation - undisturbed grade.

