

**12/16/21****54 Clinton Ave, Dobbs Ferry NY****KEY TO SUBMITTAL SHEETS FOR EXTERIOR FINISHES**

ITEM #	MANUFACTURER/SUPPLIER ITEM	COLOR	LOCATION
01	Limewash Brick	"Navajo White"	Existing Brick to be refinished
02-03	HardiePlank Lap & Vertical Siding	"White"	New siding throughout
04-05	Timberline HDZ Shingles	"Driftwood"	Roof throughout
06-07	Anderson 400 Casement	"Dragon's Breath"	Typical replacement windows
08-09	Carriage House Doors	"Stonington Gray"	New Garage Doors
10	Therma-Tru Doors	"Stonington Gray"	All new exterior doors
11	Gutter Kings Seamless Gutter	"Stonington Gray"	Gutters throughout and downspouts
12	Aquastorm Permiabie Paver	"gray"	Permeable Pavers as appropriate
13	Victorien Permiabie Paver	"Shale Gray"	Permeable Pavers as appropriate
14	Advantage IPE Decking	"Stonington Gray"	New decking
15	Benjamin Moore HC-170	"Stonington Gray"	Exterior trim
16	Benjamin Moore HC-173	"Edgecomb Gray"	Exterior trim
17-18	Unilock Olde Quarry	"Sandstone"	Retaining Wall



# HardiePanel®

HardiePanel® vertical siding delivers style and substance. When combined with HardieTrim® boards, it achieves the rustic board-and-batten look that defines cottage charm. The covered seams contribute to a well-insulated home.

Its crisp, clean lines make HardiePanel vertical siding a smart choice for strong, contemporary designs.

HardiePanel®  
Vertical Siding  
Evening Blue

HardieTrim®  
Batten Boards  
Evening Blue

True to your needs of  
**PERFORMANCE AND BEAUTY.**

# HardiePanel®

Thickness 5/16 in

## SELECT CEDARMILL®, SMOOTH, STUCCO & SIERRA 8

Size	4 ft x 8 ft	4 ft x 10 ft
Prime Pcs/Pallet	50	50
ColorPlus Pcs/Pallet	50	50
Pcs/Sq	3.2	2.5

### SELECT CEDARMILL®



Size	4 ft x 8 ft	4 ft x 10 ft
STATEMENT COLLECTION™		✓
DREAM COLLECTION™	✓	✓
PRIME	✓	✓

### SMOOTH



Size	4 ft x 8 ft	4 ft x 10 ft
STATEMENT COLLECTION™		✓
DREAM COLLECTION™	✓	✓
PRIME	✓	✓

### STUCCO



Size	4 ft x 8 ft	4 ft x 10 ft
STATEMENT COLLECTION™		
DREAM COLLECTION™	✓	✓
PRIME	✓	✓

### SIERRA 8



Size	4 ft x 8 ft	4 ft x 10 ft
STATEMENT COLLECTION™		
DREAM COLLECTION™		
PRIME	✓	✓



## HardieTrim®

Form meets function at every angle with HardieTrim® boards. With an authentic look, HardieTrim boards provide design flexibility for columns, friezes, doors, windows and other accent areas.

Better than wood, it will complement your long-lasting, lower maintenance James Hardie® siding – adding punctuation to your design statement.

HardieTrim®  
Boards  
Khaki Brown

HardiePlank®  
Lap Siding  
Navajo Beige


The performance you require.

**THE DISTINCTIVENESS YOU DESIRE.**

# HardieTrim®

Length 12 ft boards

## NT3® BOARDS SMOOTH

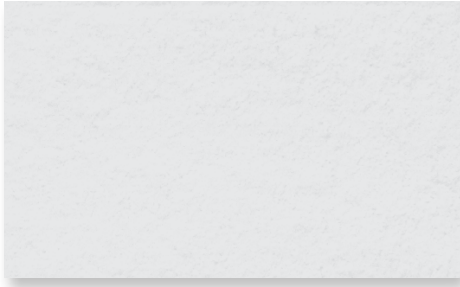

### 4/4 SMOOTH

Thickness	.75 in				
Width	3.5 in	5.5 in	7.25 in	9.25 in	11.25 in
ColorPlus Pcs/Pallet	312	208	156	104	104

STATEMENT COLLECTION™	✓	✓	✓		✓
DREAM COLLECTION™	✓	✓	✓	✓	✓
PRIME					


### 5/4 SMOOTH

Thickness	1 in					
Width	3.5 in	4.5 in	5.5 in	7.25 in	9.25 in	11.25 in
ColorPlus Pcs/Pallet	240	200	160	120	80	80

STATEMENT COLLECTION™	✓	✓	✓	✓		✓
DREAM COLLECTION™	✓	✓	✓	✓	✓	✓
PRIME						

## BATTEN BOARDS

### SMOOTH



### RUSTIC GRAIN®



### SMOOTH & RUSTIC GRAIN®

Thickness	.75 in	STATEMENT COLLECTION™	✓
Width	2.5 in	DREAM COLLECTION™	✓
Prime Pcs/Pallet	190	PRIME	✓
ColorPlus Pcs/Pallet	437		

## STATEMENT COLLECTION™


Make your next home stand out with our Statement Collection™ products. Carefully curated by our design experts specifically for your market, the collection brings together the most popular James Hardie ColorPlus® siding and trim styles, textures, and colors. This stunning selection is locally stocked and designed for simplicity - making it easier than ever to get a beautiful, long-lasting home exterior.

## ColorPlus® Technology

### Plank, Panel, Shingle and Batten Color Offering



### Trim Color Offering

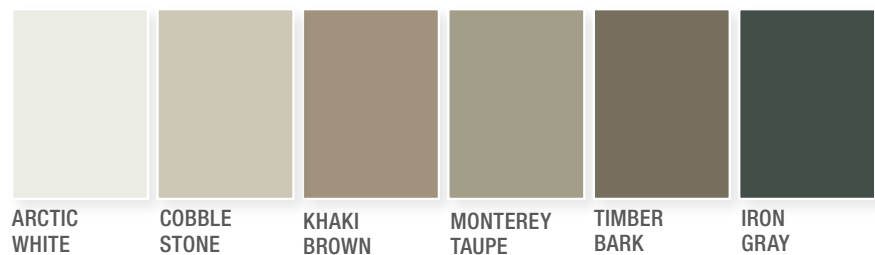

Colors shown are as accurate as printing methods will permit.  
Please see actual product sample for true color.

## HardiePlank®



### SELECT CEDARMILL®

Width 6.25 in 8.25 in  
Exposure 5 in 7 in



### SMOOTH


Width 6.25 in 8.25 in  
Exposure 5 in 7 in

## HardiePanel®



### SELECT CEDARMILL®

Size 4 ft x 10 ft



### SMOOTH

Size 4 ft x 10 ft

## HardieShingle®



### STRAIGHT EDGE PANEL

Height 14 in 15.25 in  
Exposure 5 in 7 in


## HardieTrim®

### 4/4 SMOOTH



Thickness .75 in  
Length 12 ft boards  
Width 3.5 in 5.5 in 7.25 in 11.25 in


### 5/4 SMOOTH

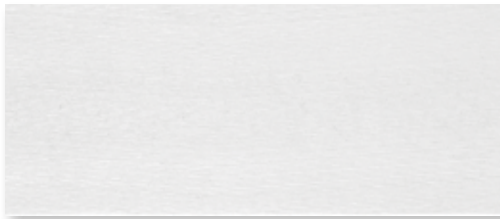

Thickness 1 in  
Length 12 ft boards  
Width 3.5 in 4.5 in 5.5 in 7.25 in 11.25 in

## BATTEN BOARDS

### 4/4 SMOOTH & RUSTIC GRAIN®



.75 in  
2.5 in



Selecting a color? Request a product sample  
at [jameshardiepros.com/samples](https://jameshardiepros.com/samples)







# Timberline® HDZ™ Shingles

The look people know and love, now featuring LayerLock™ Technology

Color/Finish: Driftwood



[SEE COLORS AVAILABLE IN MY AREA >](#)



4.8 (15300)

[WRITE A REVIEW](#)





# CASEMENT & AWNING WINDOWS

## FEATURES

### Frame

**A** A seamless one-piece, rigid vinyl frame cover is secured to the exterior of the frame to protect the wood frame from moisture and maintain an attractive appearance while minimizing maintenance.

**B** The seamless rigid exterior vinyl cover extends 1 3/8" (35) around the perimeter of the unit. This creates a flange to help seal the unit to the structure.

**C** Wood frame members are treated with a water-repellent preservative for long-lasting\* protection and performance.

**D** Interior stops are unfinished pine. Low-maintenance prefinished white, dark bronze and black interiors are also available.

### Sash

**E** Rigid vinyl encases the entire sash — a vinyl weld protects each sash corner for superior weathertightness. It maintains an attractive appearance and minimizes maintenance.

**F** Wood core members provide excellent structural stability and energy efficiency.

**G** Flexible bulb weatherstrip or vinyl closed-cell foam weatherstrip is factory installed on the perimeter of the sash.

### Glass

**H** A glazing bead and silicone provide superior weathertightness and durability.

**I** High-Performance glass options include:


- Low-E4® glass
- Low-E4 HeatLock® glass
- Low-E4 Sun glass
- Low-E4 SmartSun™ glass
- Low-E4 SmartSun HeatLock glass

Tempered glass and other glass options are available. Contact your Andersen supplier.

A removable translucent film helps shield the glass from damage during delivery and construction and simplifies finishing at the jobsite.

### Patterned Glass

Patterned glass options are available. See page 12 for more details.

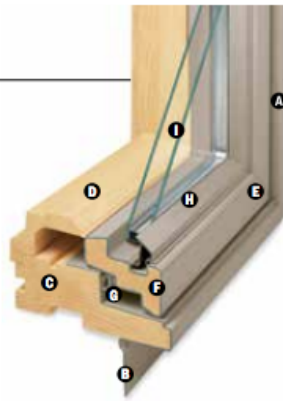

### Hardware

#### Smooth Control Hardware System



The smooth control hardware system employs a worm gear drive for easy operation. Units with a wash mode have hinges that move the sash away from the frame to

provide easier glass cleaning. CXW15, CXW155, CXW16 and CXW25 sizes are not available with wash mode. Hardware option and finish must be specified. Operator handle and cover sold separately.

#### Single-Actuation Casement Lock



On casement windows, a single-actuation lock easily releases all locking points on casement sash while the reach-out action eliminates binding when closing. The lock handle is offered in finishes that coordinate with your specified hardware option.

#### Awning Sash Locks



Awning sash locks provide an added measure of security and weathertightness. Hardware style and finish options are compatible with Andersen® casement windows to ensure consistency in appearance when used in combination designs.

## StormWATCH<sup>®</sup> PROTECTION

Casement and awning windows are available with Stormwatch® Protection. Visit [andersenwindows.com/coastal](http://andersenwindows.com/coastal) for more details.

### Performance Grade (PG) Upgrade


Performance upgrades are available for select casement and awning sizes, allowing these

units to achieve higher performance ratings. Performance Grade (PG) Ratings are more comprehensive than Design Pressure (DP) Ratings for measuring product performance. Contact your Andersen supplier for availability. For up-to-date performance information of individual products, visit [andersenwindows.com](http://andersenwindows.com).

## EXTERIOR




## INTERIOR



Naturally occurring variations in grain, color and texture of wood make each window one of a kind. All wood interiors are unfinished unless a prefinished option is specified.

## HARDWARE FINISHES

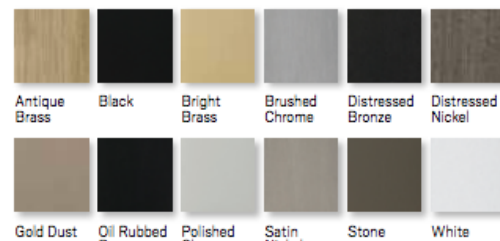

Distressed bronze and oil rubbed bronze are "living" finishes that will change with time and use.

## CASEMENT & AWNING HARDWARE OPTIONS\*

### CLASSIC SERIES™



Stone | White

### ESTATE™



**Antique Brass** | Bright Brass  
Brushed Chrome | Distressed Bronze  
Distressed Nickel | Oil Rubbed Bronze  
Polished Chrome | Satin Nickel

### TRADITIONAL FOLDING



**Antique Brass** | Black | Bright Brass  
**Distressed Bronze** | Distressed Nickel  
Gold Dust | Oil Rubbed Bronze | Satin Nickel  
Stone | White

### CONTEMPORARY FOLDING



**Black** | Bright Brass  
Gold Dust | Oil Rubbed Bronze  
**Satin Nickel** | Stone | White

Folding handle avoids interference with window treatments.  
Bold name denotes finish shown.

\* Visit [andersenwindows.com/warranty](http://andersenwindows.com/warranty) for details.

\*\* Dark bronze and black interiors are only available with dark bronze and black exteriors respectively.

† Hardware sold separately.

Dimensions in parentheses are in millimeters.

Printing limitations prevent exact replication of colors and finishes.

See your Andersen supplier for actual color and finish samples.

# Dragon's Breath


1547





## WOOD COLLECTION SPECIFICATIONS

SPECIFICATION	DETAILS
Trim Options, Paint Grade	5⁄8" Extria (standard) bonded to the facing with concealed fasteners.
Trim Options, Stain Grade	Clear western red cedar, select tight knot cedar, mahogany, Douglas fir, lpe redwood, or any other available materials as specified.
Color Options, Paint Grade	Gray factory prime.
Color Options, Stain grade	Unfinished.
Construction Type	Shiplap meeting rails for superior strength and better sealing against wind, rain and snow.
Windows	1⁄8" DSB (standard) stopped and sealed in place. However, many other types of glass are available and optional (please specify).
Insulation	1 3⁄8" CFC-free expanded polystyrene insulation
R-value	6
Dimensions	Section widths available in 1⁄4" inch increments up to 22 feet wide. Door heights available in 1⁄4" inch increments up to 16 feet.
Fire-Rating Testing Information	<a href="#">See more info on our Fire Rating page.</a>
Wind Load Testing Information	<a href="#">See more info on our wind load testing page.</a>
Warranty Details	<a href="#">See our warranty page.</a>

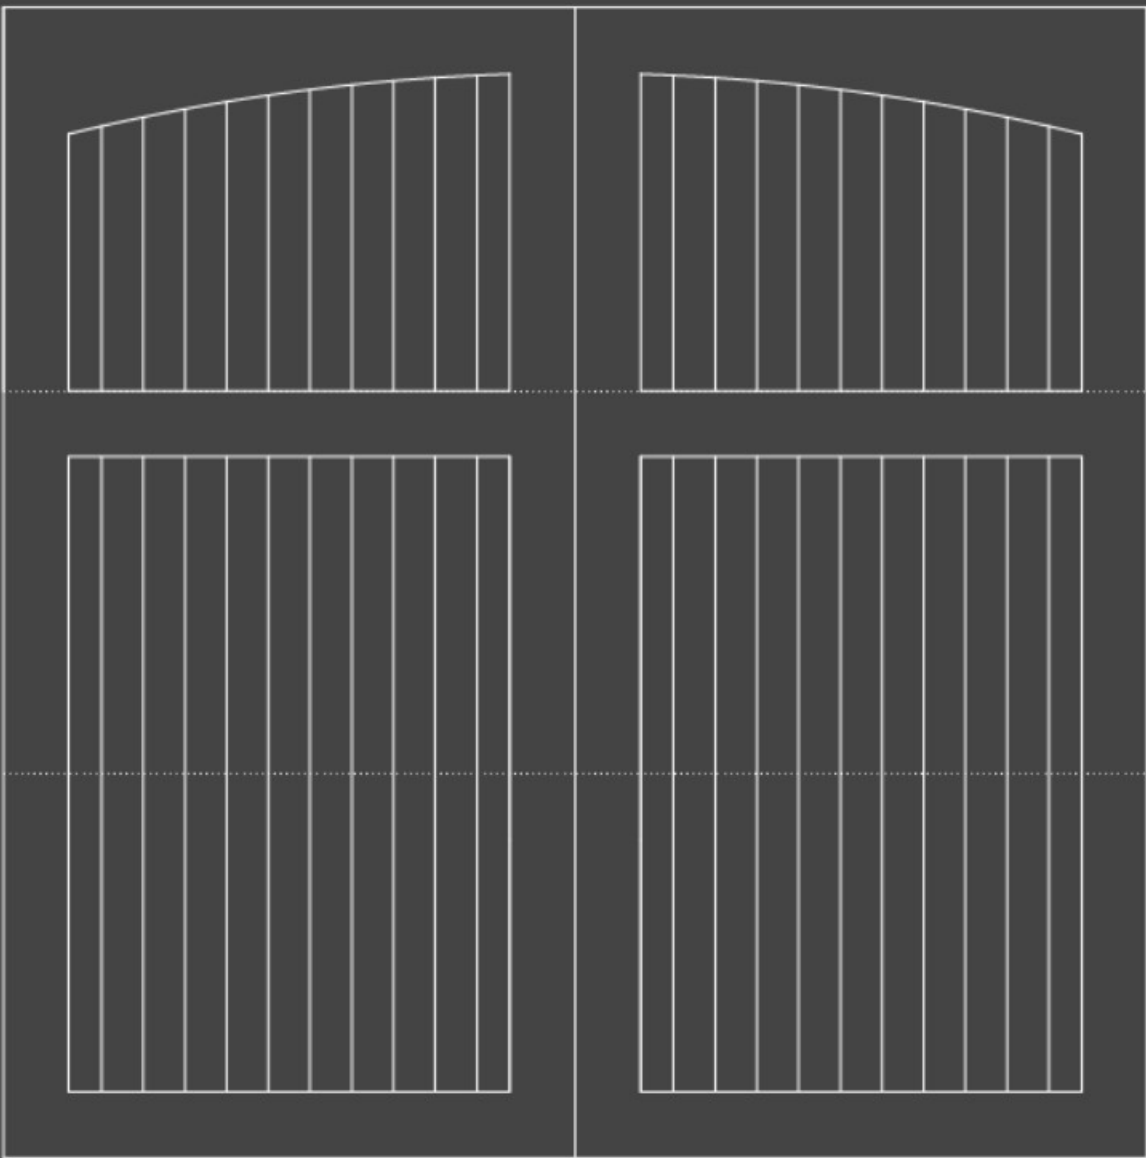

S262XJ-SDL

**Smooth-Star®**



Included in Your Entryway Project:



# Project Summary

**Door Type**  
Entry

**Door Configuration**  
Single with Sidelites

**Door Size**  
3'0" × 6'8"


# Door Configuration

**Door Style**




Smooth-Star®  
  
S262XJ-SDL

**Glass Style**

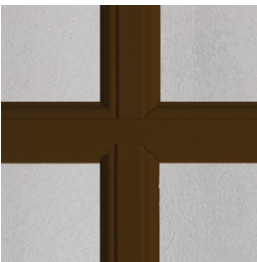

Chinchilla Colonial 9 Lite 3Wx3H  
Simulated Divided Lites

**Finish Option**



Alpine

**Door Lite Frame**



Smooth-Star Scrolled Lite Frame

## Sidelite Configuration

---


### Sidelite Style



Smooth-Star®


S263XJSL-SDL

### Glass Style

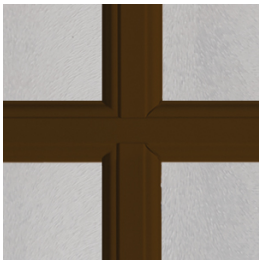

Chinchilla Colonial 3 Lite 1Wx3H  
Simulated Divided Lites

### Finish Option



Alpine

### Sidelite Lite Frame



Smooth-Star Scrolled Lite Frame

## Accessories


---

### Frame Profile



### Handleset





**Smooth-Star Scrolled Lite Frame**

Heirloom Brushed Nickel

FIND BY

Color

- Dark Bronze
- 30 White (1)
- 80 White (1)
- Black (1)
- Clay (1)
- Copper (1)
- Galvanized (1)
- Grecian Green (1)
- Herringbone (1)
- Linen (1)
- Pearl Gray (1)
- Royal Brown (1)
- Tuxedo Gray (1)

Material

Size

resetAdvanced Search

MY ACCOUNT

- Orders
- Compare list

Track my order(s)

Order ID/Email

Sign in | Register

4" Plain Round Downspout

3" & 4" round copper downspout is available in plain and corrugated in both 16 & 20oz in standard 10' lengths.

3" & 4" round galvanized downspout is available in plain and corrugated in 24, 26, 28 & 30ga plus 26ga paint grip in standard 10' lengths.

4" round aluminum downspout is available in plain and corrugated in limited colors in standard 10' lengths.

4" Color Availability Chart

Sort by Alphabetical: A to Z10 Per Page



4" Dark Bronze Plain Round Aluminum Downspout (.019)

CODE: DS4RBZ

\$2.11

ADD TO CART

In stock

All downspout is priced by the foot but sold only in increments of 10' (10', 20', 30', etc). This product is stocked in our... [More](#) →


Qty: 10Minimum quantity for "4" Dark Bronze Plain Round Aluminum Downspout (.019)" is 10.



# AQUASTORM

**DESCRIPTION:** Paver **TEXTURE:** Smooth

## PALLET OVERVIEW



Aqua Storm paver meet and exceeds the requirements of ASTM C1319 for Concrete Grid Paving Units.

## NOTES

See page 60 to 62 for more technical information. When used in a permeable pavement application, see page 99 to 104 for more technical information.


See page 29 for more information about applications.

**JOINT WIDTH:** 1 5/8" (41 mm)  
**% OF SURFACE OPENING:** 38 %  
**INFILTRATION RATE:** 2 395 in./hr  
 (60 842 mm/hr)

## WINTER CONDITIONS


De-icing salts should never be used on grass as salt will damage it. The snowblower blade should be set to leave a 3/4 to 1 1/2 in. (2 to 4 cm) tamped snow cover to protect the grass from extreme cold and prevent it from being torn off during snow removal.

Specifications per pallet		Imperial	Metric
Cubing		<b>78.39 ft²</b>	7.28 m²
Approx. Weight		2 245 lbs	1 018 kg
Number of rows		7	
Coverage per row		11.20 ft²	1.04 m²
Linear coverage per row	Depth	13.39 lin. ft	4.08 lin. m
	Length	6.69 lin. ft	2.04 lin. m




Unit dimensions	in	mm	Units/pallet
Height	3 15/16	100	56 units
Width	10 1/16	255	
Length	20 1/16	510	


01 | Linear pattern




02 | Linear pattern




03 | Herringbone pattern



04 | Herringbone pattern



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.




# INSTALLATION GUIDE

## AQUASTORM - CAVITY INFILL

### GRASS INFILL


Cross section

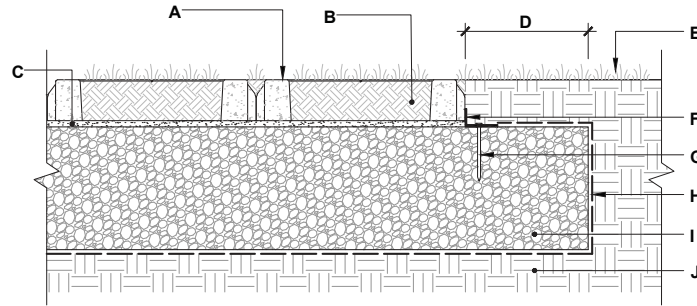

- A. TECHO-BLOC AQUASTORM PRECAST CONCRETE PAVER  
3<sup>15</sup>/<sub>16</sub>" (100 mm) THICK.
- B. TOPSOIL INFILL (CAVITIES AND JOINTS)
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- E. LAWN
- F. PLASTIC EDGE
- G. NAIL
- H. GEOTEXTILE
- I. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- J. SUBGRADE

### AGGREGATE INFILL

Cross section

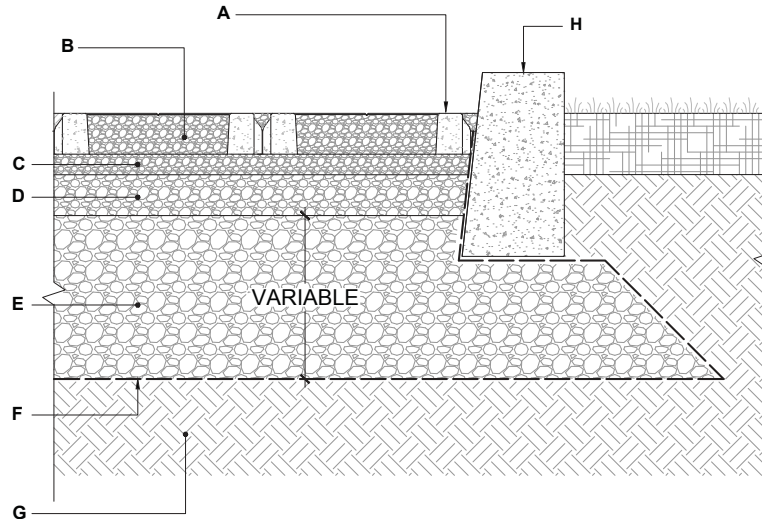

- A. TECHO-BLOC AQUASTORM PERMEABLE PAVER  
3<sup>15</sup>/<sub>16</sub>" (100 mm) THICK.
- B. JOINTS AND CAVITIES FILLING MATERIAL  
ASTM No 8 (CSA 2.5-10 mm) AGGREGATE
- C. BEDDING COURSE 2" (50 mm)  
ASTM No 8 (CSA 2.5-10 mm) AGGREGATE
- D. BASE COURSE 4" (100 mm)  
ASTM No 57 (CSA 5-28 mm) AGGREGATE
- E. SUBBASE COURSE  
ASTM No 2 (CSA 40-80 mm) AGGREGATE
- F. GEOTEXTILE
- G. SUBGRADE
- H. CONCRETE EDGE






## VICTORIEN 60 mm

**DESCRIPTION:** Paver **TEXTURE:** Smooth

### PALLET OVERVIEW



### NOTES

See page 60 to 62 for more technical information.


See page 29 for more information about applications.

Specifications per pallet		Imperial	Metric
60 mm	Cubing	<b>123.70 ft<sup>2</sup></b>	11.50 m <sup>2</sup>
	Approx. Weight	3 481 lbs	1 579 kg
	Number of rows	11	
	Coverage per row	11.25 ft <sup>2</sup>	1.05 m <sup>2</sup>
	Linear coverage per row	Depth 15.87 lin. ft Length 31.74 lin. ft	4.84 lin. m 9.68 lin. m




Unit dimensions	in	mm	Units/pallet
Height	2 3/8	60	495 units
Width	4 1/4	108	4 units/ft <sup>2</sup>
Length	8 1/2	216	43.10 units/m <sup>2</sup>


01 | Linear pattern




02 | Linear pattern




05 | Parquet pattern



06 | Herringbone pattern



07 | Herringbone pattern



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.


Chocolate Brown



Shale Grey



Onyx Black






## VICTORIEN 60 mm PERMEABLE

**DESCRIPTION:** Paver **TEXTURE:** Smooth

### PALLET OVERVIEW



Permeable pavers let storm water drain away and help manage excess runoff. They also smooth the path to obtaining LEED® certification.

### NOTES

See page 99 to 104 for more technical information.


See page 29 for more information about applications.

**JOINT WIDTH:** 3/8" ( 10 mm)  
**% OF SURFACE OPENING:** 9.6 %  
**INFILTRATION RATE:** 909 in./hr  
 (23 085 mm/hr)

Specifications per pallet		Imperial	Metric
60 mm PERMEABLE	Cubing	<b>110.22 ft²</b>	10.24 m²
	Approx. Weight	2 888 lbs	1 310 kg
	Number of rows	11	
	Coverage per row	10.02 ft²	0.93 m²
	Linear coverage per row	Depth	15.87 lin. ft
		Length	31.74 lin. ft
			4.84 lin. m
			9.68 lin. m




A




Unit dimensions	in	mm	Units/pallet
Height	2 3/8	60	440 units
Width	4 1/4	108	
Length	8 1/2	216	


01 | Linear pattern




02 | Linear pattern




03 | Linear pattern



04 | Linear pattern




05 | Parquet pattern



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

Chestnut Brown

Shale Grey



WE ARE OPEN! - Our factories are running at full speed. Call, click, or stop in and see us!

## FREE SHIPPING


**PROFILED** DECKING & SIDING ORDERS OVER \$2500\*  
LIVE-EDGE WOOD SLABS OVER \$500\*

\*SALE TERMS

 **COUNTDOWN TO 2021 HARDWOOD & SLAB SALE!!!** - Save All Month Long! [Shop Now](#)

# Ipe Decking & Supplies

Also known as: [Tabebuia Serratifolia](#), Pau D'Arco, Ipe Tabaco, Yellow Poui, and Bethabara

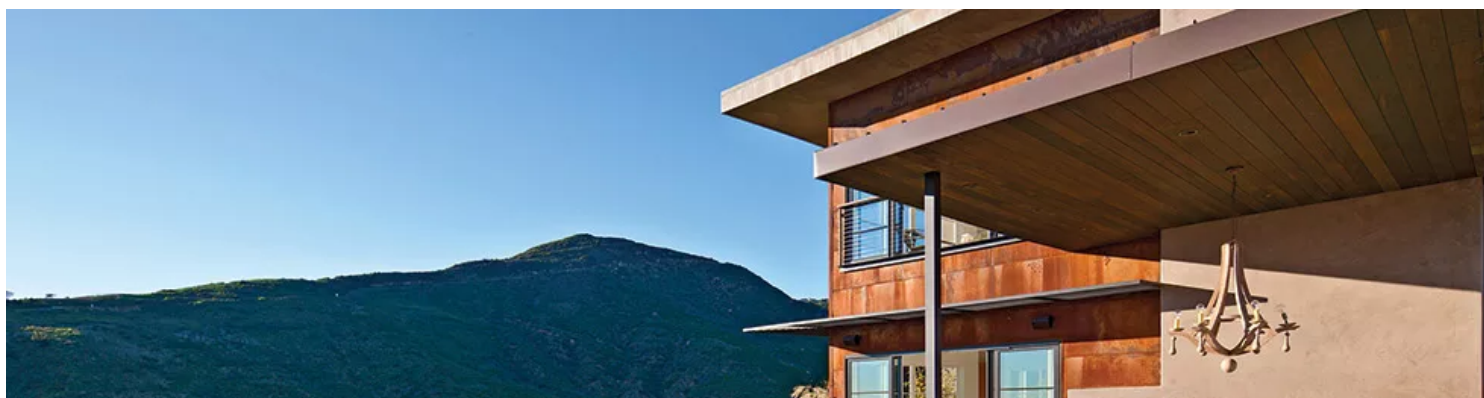

## IPE DECKING

Advantage Ipe Decking Offers All Natural Beauty



Discover More About **Ipe Decking**:

[Ipe Decking](#) | [Photos](#) | [Specs](#) | [Ipe Wood](#) | [Install Instructions](#) | [Price](#)  
You Are Here

Ipe Also Available In:

[Decking](#) | [Deck Tiles](#) | [Shiplap Siding](#) | [Rainscreen Siding](#) | [Fencing](#) | [Ceiling](#) | [Lumber](#) | [Flooring](#) | [Slabs](#)  
You Are Here

## Ipe Decking

**ONLINE QUOTE REQUEST**


[click here](#)



Decking lumber and supplies needed to build and finish your deck. We directly import our Ipe decking products from well-managed forests in South America. By working with sustainable sources, we are able to hand select the finest Ipe and provide it to our customers at great prices. Be sure to check out our [Ipe Decking Reviews](#) to find out more about this great decking material.

Rob Pelc, owner and operator of AdvantageLumber.com visits each mill to inspect and personally selects the Ipe he uses for his products. See Rob at one of the Brazilian Ipe decking mills by clicking [HERE](#). Click [HERE](#) to see why Ipe is the [best decking material](#) in the world! If you have any questions, please [contact us](#)! Ipe is such a hard, dense wood it does require a little different method of installation than other decking. Click [HERE](#) to read more about it.

## Ipe Decking Prices

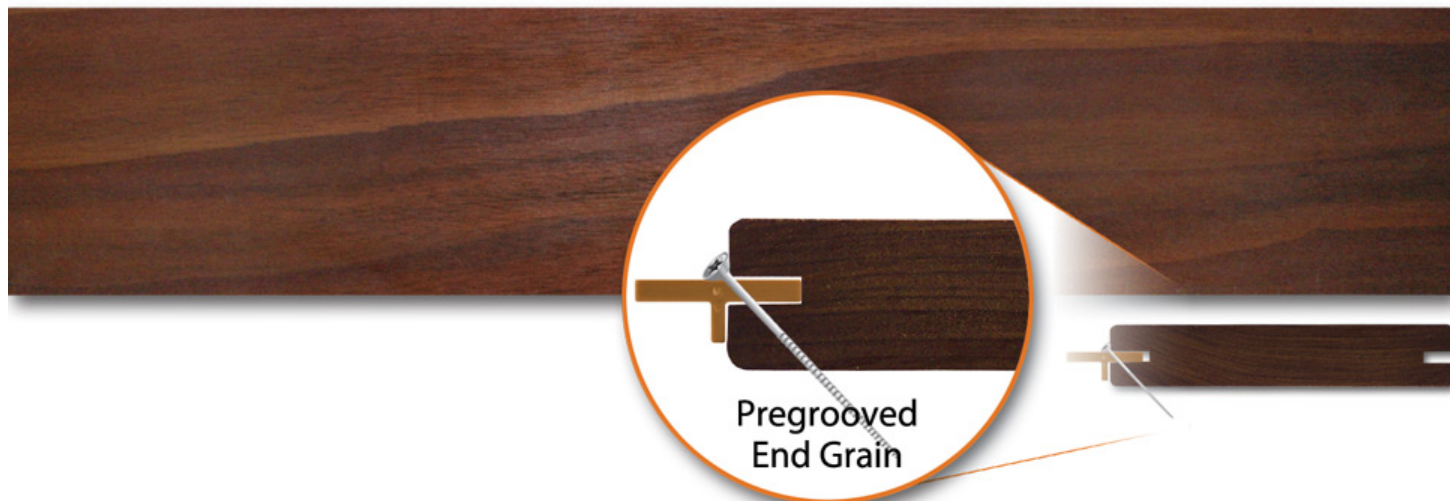

Above is an example of a Ipe decking profile. This example is of a 1 x 6 pregrooved Ipe deck board. A "profile" is a diagram of the end of a piece of lumber. You can view more lumber profiles under each decking size below.

**Which profile should you choose?** Click below to see some interactive 3D samples of all the different decking profiles we offer:

- [Standard](#)
- [Pregrooved](#)
- [Tongue & Groove](#)

*Tap on a profile to view a detailed drawing.*

Decking sold in even and odd lengths between 6' to 20'.

We can pull your order to specific lengths.

Add an additional upcharge of \$0.10 per lineal foot for 8-14 foot lengths.

Add an additional upcharge of \$0.80 per lineal foot for 15+ foot lengths.

Add \$1.00 per lineal foot for 19' & 20' lengths.

## Standard Ipe Decking

### Ipe 1x6 Standard

**Description:**

**$\frac{3}{4}$ " x 3  $\frac{1}{2}$ "**

19mm x 90mm

**Price Per Ln Ft:**

~~\$2.29~~

**\$2.13**

### Ipe 1x6 Standard

**Description:**

**$\frac{3}{4}$ " x 5  $\frac{1}{2}$ "**

19mm x 140mm

**Price Per Ln Ft:**

~~\$3.43~~

**\$3.19**

**Stonington Gray**

HC-170

Edgecomb Gray

HC-173





# Olde Quarry™

1-800-UNILOCK | UNILOCK.COM

**UNILOCK**  
PAVERS & WALLS





COFFEE CREEK



GRANITE



RIVER



SANDSTONE



SIERRA

	Wall	Corner	Coping
Bundle Type	RANDOM	SINGLE	SINGLE
Thickness (mm)	114MM	114MM	75MM
Dimension mm		300mm X 114mm X 230mm	305mm x 75mm x 305mm
Dimension Imperial		11 7/8" X 4 1/2" X 9"	12" x 3" x 12"

FCFT PER	Bundle	33.75	30.89	24.00
	Layer	5.63000	6.18000	3.00000
	Stone	0.38	0.39	0.25

PER BUNDLE	Layers	6.00	5.00	8.00
	Sections	5.00	4.00	4.00

LNFT PER	Bundle	90.00	82.40	96.00
	Unit	1.00	1.03	1.00

UNITS PER	SqFt	2.67	2.59	4.00
	Section	18.00	20.00	24.00
	Bundle	90.00	80.00	96.00

LBS PER	Layer	521	630	380
	Section	625	788	760
	Bundle	3,125	3,150	3,039

### 3 UNIT RANDOM BUNDLE



15" UNIT  
15 (12) x 4 1/2 x 9"  
380 (305) x 114 x 230mm  
30 units/Bundle  
.47 Fc.Ft./Stone




12" UNIT  
12 (9) x 4 1/2 x 9"  
305 (230) x 114 x 230mm  
30 units/Bundle  
.38 Fc.Ft./Stone



9" UNIT  
9 (6) x 4 1/2 x 9"  
230 (150) x 114 x 230mm  
30 units/Bundle  
.28 Fc.Ft./Stone



STANDARD CORNER  
11 7/8 x 4 1/2 x 9"  
300 x 114 x 230mm



COPING  
12 (9) x 3 x 12"  
305 (230) x 75 x 305mm  
32 Corner units/Bundle

Internal Use Only. OQY CH

Notes: Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. Coping Bundle includes 16 End Units per bundle - Not sold separately. Ledgerstone®, Olde Quarry Coping, Brussels Block® XL, Brussels Fullnose® or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

## SANDSTONE



PICK A COLOR



SANDSTONE